

SURFACE COLLECTION

SOOTHE

STRUCTURED LAYERS OF SOFT ULTRA MATTE SURFACE SOPHISTICATION

Engage your senses and transform your space with sleek and sophisticated SOOTHE panels. Incredibly smooth and soft to the touch, Soelberg Industries' SOOTHE panels utilize a proprietary multi-layered acrylic surface bonded to a premium MDF core. Featuring a superior hardcoat protection layer for excellent scratch and chemical resistance, SOOTHE panels make it easy to specify for any project.

SPECIFICATIONS

- **Core Thickness:** 3/4" Premium MDF core with a co-extruded polymer ultra matte acrylic top layer.
- **Panel Size:** 4' x 8' max or cut to size
- **Colors and Edgebanding:** 5 different smooth and supple colors to choose from with 5 matching edgebanding options. (See below)

KEY FEATURES

- **Incredibly Smooth Matte Finish:** designed to absorb light reflection creating a soft appearance and touch.
- **Scratch Resistant:** top hardcoat layer developed to be the most scratch-resistant acrylic.
- **Color Richness:** several layers are UV stabilized to ensure original color depth without fading.



Pure White Matte



Pebble Matte



Beige Matte



Stone Matte



Black Matte


MAINTENANCE

To maintain SOOTHE panels, gently clean, do not scrub, with a clean, soft, lint-free cloth and water. Best results will be achieved using a micro-fiber cloth or chamois, and if necessary, a non-abrasive soap or detergent. Do not use brushes, scourers or scrapers. Do not clean in direct sunlight.

INSTALLATION RECOMMENDATIONS

SOOTHE panels are intended for dry interior vertical applications. All mounting areas should be clean and free of debris. There are a variety of installation methods that can be used. It is the responsibility of the purchaser to understand the site conditions and install according to those conditions. Installation guides and hardware options can be found at www.soelbergi.com

PANEL COMPOSITION

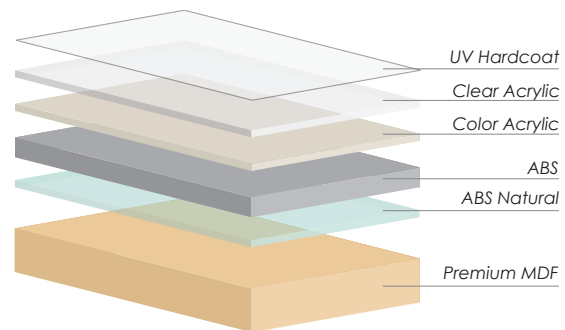

- **Bonding Layer:** ABS natural developed to create the best bond to Premium MDF core with no orange peel.
- **Cleanroom Production Facility:** processed in an ISO cleanroom environment to mitigate impurities.

STORAGE

SOOTHE panels should be stored in an interior HVAC controlled environment. Store panels horizontally and panels should be well supported at all times in the original shipping crate. Panels are supplied with a protective film, which should not be removed until the installation and project are complete. Ensure panels with masking film are not stored in direct sunlight as the film could be affected and difficult to remove.

MATERIAL HANDLING

SOOTHE panels should be handled with care and supported at all times. Do not allow any hard or abrasive materials or surfaces to come in contact with SOOTHE panels.