

## MUTO | ACOUSTIC SLAB PANEL SPECIFICATIONS

MUTO Slab Panels by Soelberg are your solution for designing with soft tactile PET texture and sound absorbing success. Ideal for large open concept walls and ceiling or small intimate spaces, MUTO Slab Panels mute noise levels for productive environments.



### PRODUCT SPECIFICATIONS

**Panel Size:** 48" x 110"

**Core Thickness:** +/- 1/2"

**Core Material:** 100% PET Polyester

**Weight:** 1/2 lb / square foot

**Acoustic Rating:** 0.45 - 0.90 NRC *(depending on design and installation)*

**Fire Rating:** 1/2" core Class A 1 in accordance with ASTM-E84 1" in core Cashmere, Nordic Knit or Graphite is Class A


**Surface Finish:** Matte

**Application:** Indoor use only


**Colorfastness to Light:** In accordance with AATCC 16.3 option 3 color change at 20 AFU was 4.5

### COLORS

#### 1/2" COLORWAYS

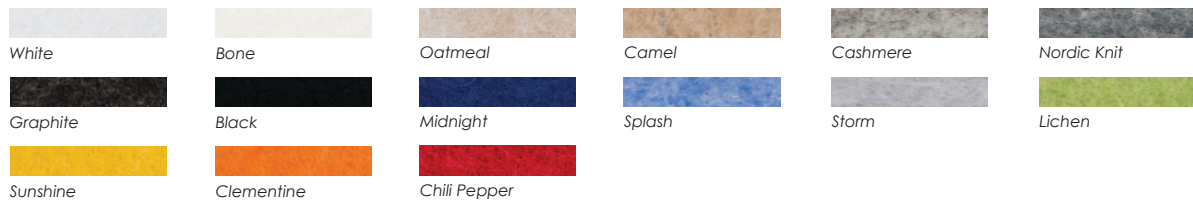

#### 1" COLORWAYS



### INSTALLATION

Please visit <http://soelberg.com/install-instructions/> for full installation recommendations.

### CLEANING AND CARE

Vacuum to remove dirt and dust. Remove spills or spots immediately using a clean damp cloth. Carpet and fabric cleaners can also be used to clean. (Always test an inconspicuous area first.)