

# TASCA

MUTO acoustic  
ceiling baffle solutions

---



SOELBERG

# TASCA

## MUTO acoustic ceiling solutions

With large open-concept floor plans and fast paced office culture comes noise. MUTO Tasca ceiling baffles are your solution for ceilings that speak softly. Manufactured with a 1/2" folded PET core to create 1" thick baffles, Tasca offers increased rigidity, structure and optimal sound absorption. Maximize sound control with MUTO.

Make It Cool. Make It Quiet.

### SPECIFICATION

<b>CONTENT</b>	100% POLYESTER (PET) FELT
<b>CORE THICKNESS</b>	1/2" (12MM)
<b>BAFFLE THICKNESS</b>	1" FOLDED
<b>COLORWAYS</b>	27 COLORWAYS & 12 WOODED GRAINS 4 PRINT COLORS OR CUSTOM
<b>SIZE</b>	MIN LENGTH: 24" (NOMINAL) MAX LENGTH: 108" (NOMINAL) DEPTH: 6" OR 10"
<b>WEIGHT</b>	1 LB   SQUARE FOOT
<b>HARDWARE</b>	COUPLER OR STRUTCLIP
<b>ACOUSTICS</b>	0.45 - 0.70 NRC
<b>FIRE RATING</b>	CLASS A   ASTM - E84
<b>ENVIRONMENTAL</b>	DELCARE, MINDFUL MATERIALS & GREENGUARD GOLD CERTIFIED. MUTO IS PRODUCED FROM 100% RECYCLABLE PET FELT WITH A MINIMUM OF 60% PRE-CONSUMER RECYCLED CONTENT.
<b>COLORFASTNESS</b>	IN ACCORDANCE WITH ATCC 16.3 OPTION 3 THE COLOR CHANGE TO LIGHT AT 20 AFU WAS 4.5.
<b>FINISH</b>	MATTE
<b>APPLICATION</b>	INDOOR USE ONLY
<b>LEAD TIME</b>	2 - 4 WEEKS
<b>WARRANTY</b>	2 YEARS


### TOLERANCE

PET core is a soft fibrous material. All dimensions and squareness are subject to +/- 1/16" tolerance.

### MAINTENANCE

Vacuum to remove dirt and dust. Remove spills or spots immediately using a clean damp cloth. Carpet and fabric cleaners can also be used to clean. (Always test an inconspicuous area first.) Compressed air may be used to dust in difficult or hard-to-reach areas.

To disinfect, bleach can be used in accordance with CDC Cleaning & Disinfection instructions. The solution ratio is 5 tablespoons of bleach to 1 gallon of water | 4 teaspoons of bleach to 1 quart of water. Apply solution by spray and wipe off immediately. (Always test in an inconspicuous area first.)

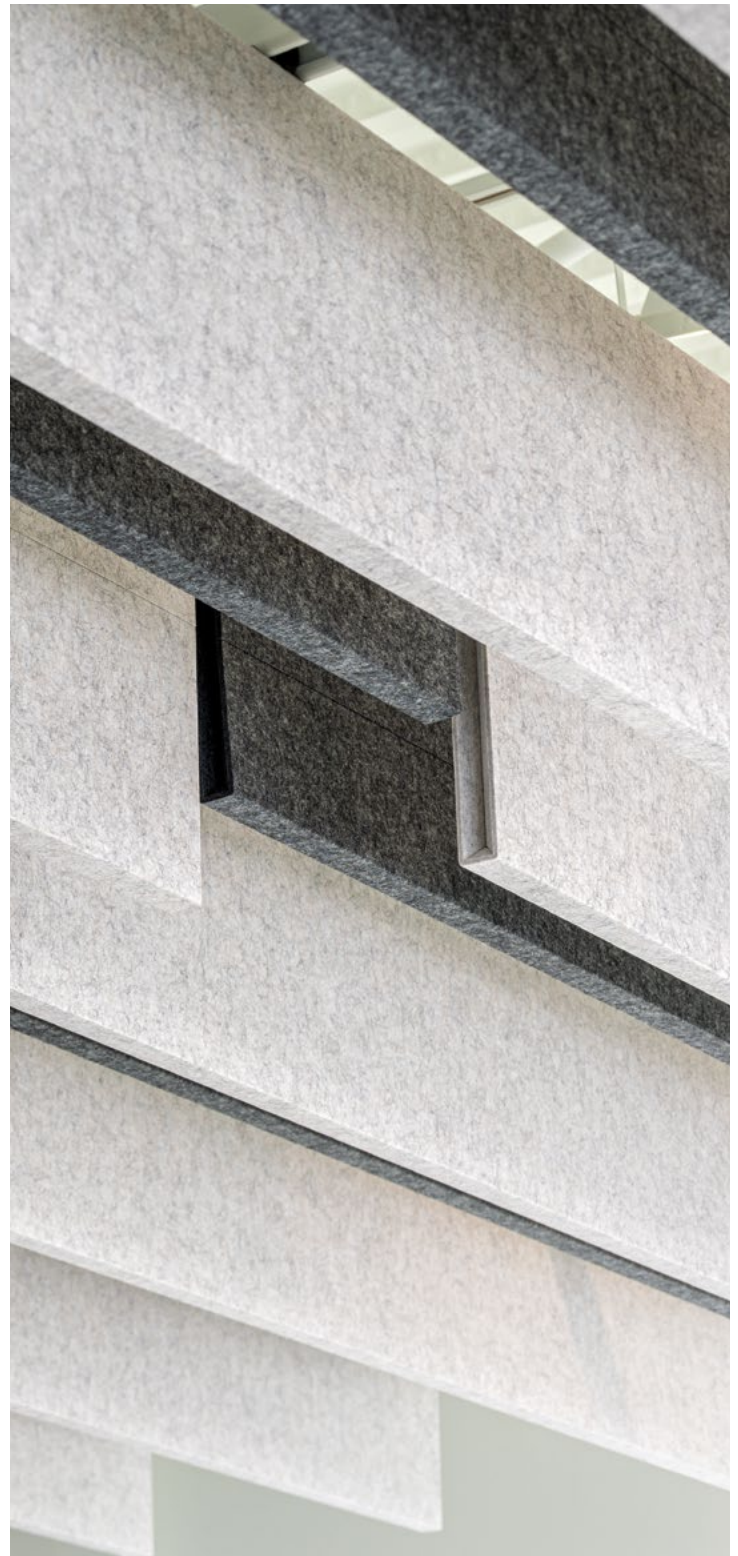

# HOW TO SPECIFY

It is easy to specify Tasca with five simple steps.

# 1

## CHOOSE YOUR COLOR

Select from 27 beautiful solid colors, 12 rich printed wood grains, 4 standard printed colors or unlimited custom print.

# 2

## SELECT BAFFLE END CONDITION

Choose open ends with beautiful chamfered edge detail or closed end caps.

# 3

## DECIDE ON BAFFLE DEPTH

With 6" or 10" depth options, select the baffle height that fits your ceiling conditions.

# 4


## PROVIDE RCP OR BAFFLE LENGTHS

Baffle lengths range from 24" to 108". Provide your RCP and we'll lay out your baffles or indicate your desired baffle length and quantity.

# 5

## DETERMINE HARDWARE SELECTION


With Coupler or StrutClip hardware options, we make your installation simple and easy.

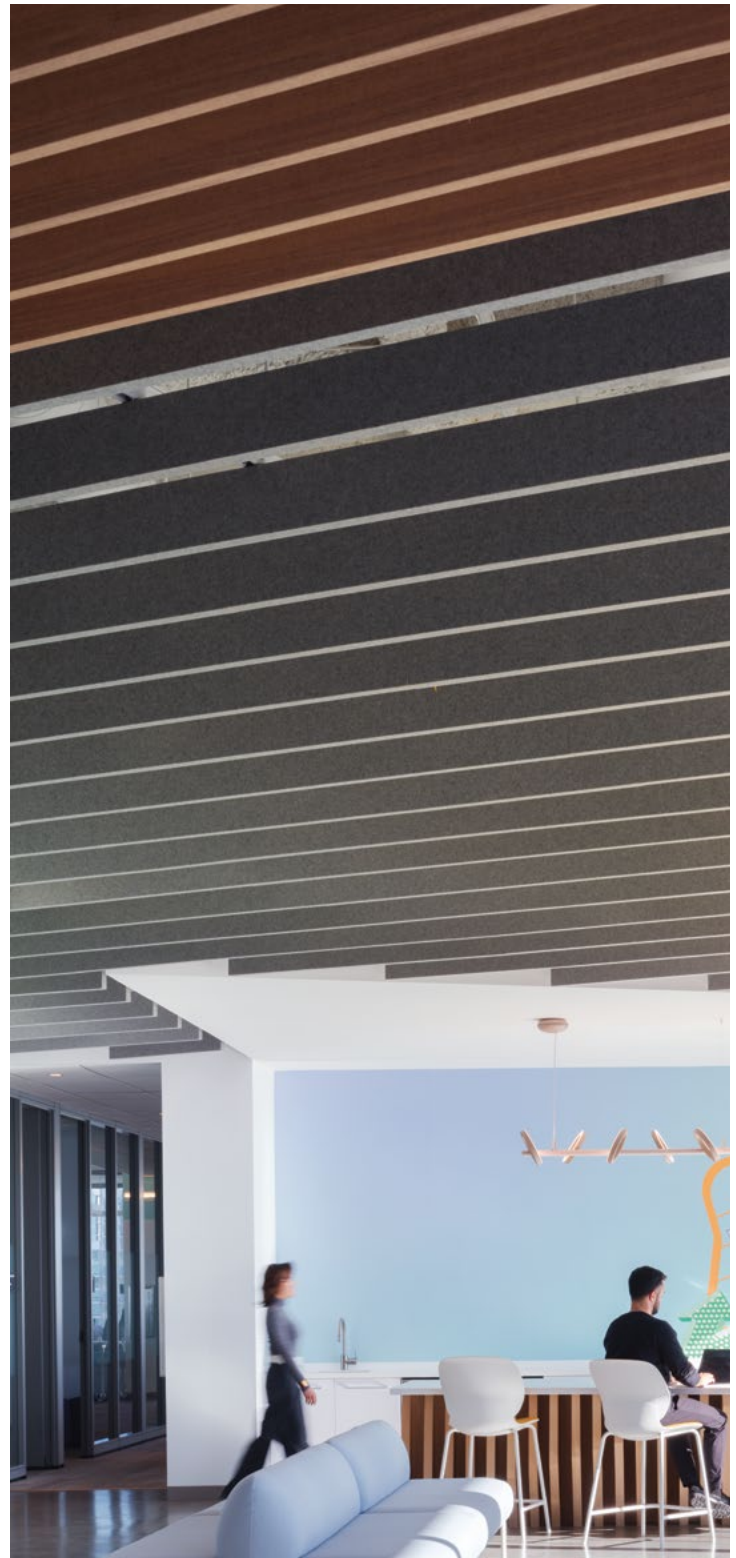


# COLOR

## MATTE COLOR


27 STANDARD COLORS  
CUSTOM PRINT COLORS AVAILABLE  
(CONTACT YOUR LOCAL SALES REP)  
100% RECYCLABLE PET FELT




WHITE



BONE



OATMEAL



CAMEL



SAND

## TOLERANCES


PET felt is made from 100% recyclable polyester plastic. Variation in depth will occur. Slight and consistent variations in color, density, texture are inherent to this core material and should be expected. Color, density and texture will vary by dye lot. MUTO is made with a 'felling' process which results in a textural heathered effect where the fibers consist of multiple tones and shades.




CASHMERE



FOG




LAMB'S EAR




PEWTER



NORDIC KNIT



WINTER WATER



GRAPHITE



BLACK



MIDNIGHT



BLUEBERRY




JUNIPER



SPLASH



STORM



SEAFOAM



SAGE




ARTICHOKE



LICHEN



SUNSHINE



QUAKING ASPEN



CLEMENTINE



CHILI PEPPER



CURRANT

## WOODED COLOR

### MATTE FINISH

12 PRINTED WOODED GRAINS  
1/2" CORE THICKNESS  
100% RECYCLABLE PET FELT


### TOLERANCES

PET felt is made from 100% recyclable polyester plastic. Slight and consistent variations in color, density, texture are inherent to this core material and should be expected. Color, density and texture will vary by dye lot. MUTO is made with a 'felling' process which results in a textural heathered effect where the fibers consist of multiple tones and shades.

Please request physical samples as colors are represented differently with different computer monitors.




WHITE WASHED OAK



BLONDE MAPLE




NATURAL ASH



AGED ASH



SMOKED ASH



AMBER ASH



WARM WALNUT



NATURAL WALNUT



BLACK WALNUT



WEATHERED PINE



CARBON WALNUT



CHARRED OAK

## PRINT COLOR


### MATTE FINISH

4 PRINTED STANDARD COLORS  
1/2" CORE THICKNESS  
100% RECYCLABLE PET FELT  
CUSTOM PRINT COLORS AVAILABLE  
(CONTACT YOUR LOCAL SALES REP)

### TOLERANCES

PET felt is made from 100% recyclable polyester plastic. Slight and consistent variations in color, density, texture are inherent to this core material and should be expected. Color, density and texture will vary by dye lot. MUTO is made with a 'felling' process which results in a textural heathered effect where the fibers consist of multiple tones and shades.


Please request physical samples as colors are represented differently with different computer monitors.



DESERT ROSE



DARK CLAY



RIVER



SAP GREEN

# SIZE

## BAFFLE END CONDITION

OPEN WITH CHAMFERED DETAIL (STANDARD)

CLOSED WITH END CAP

## BAFFLE DIMENSIONS

LENGTH: 24" - 108"

DEPTH: 6" OR 10"


## HARDWARE SPACING

48" TYPICAL SPACING FOR 5' - 8' LENGTH BAFFLES.



60" TYPICAL SPACING FOR LONGER THAN 8'.




OPEN BAFFLE END CONDITION

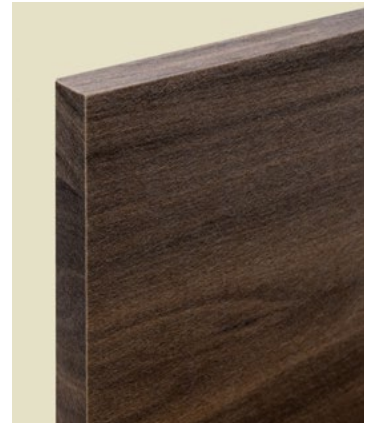

CLOSED BAFFLE END CONDITION




TASCA BAFFLE LENGTH 24" - 108"

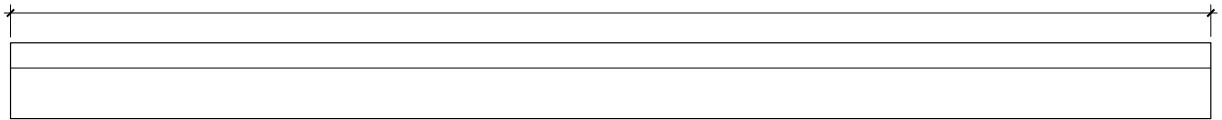

12" STANDARD ON CENTER SPACING BETWEEN BAFFLES

4" STANDARD SPACING BETWEEN BAFFLES AND SURROUNDING WALLS

1" STANDARD SPACING FROM BAFFLE END TO BAFFLE END

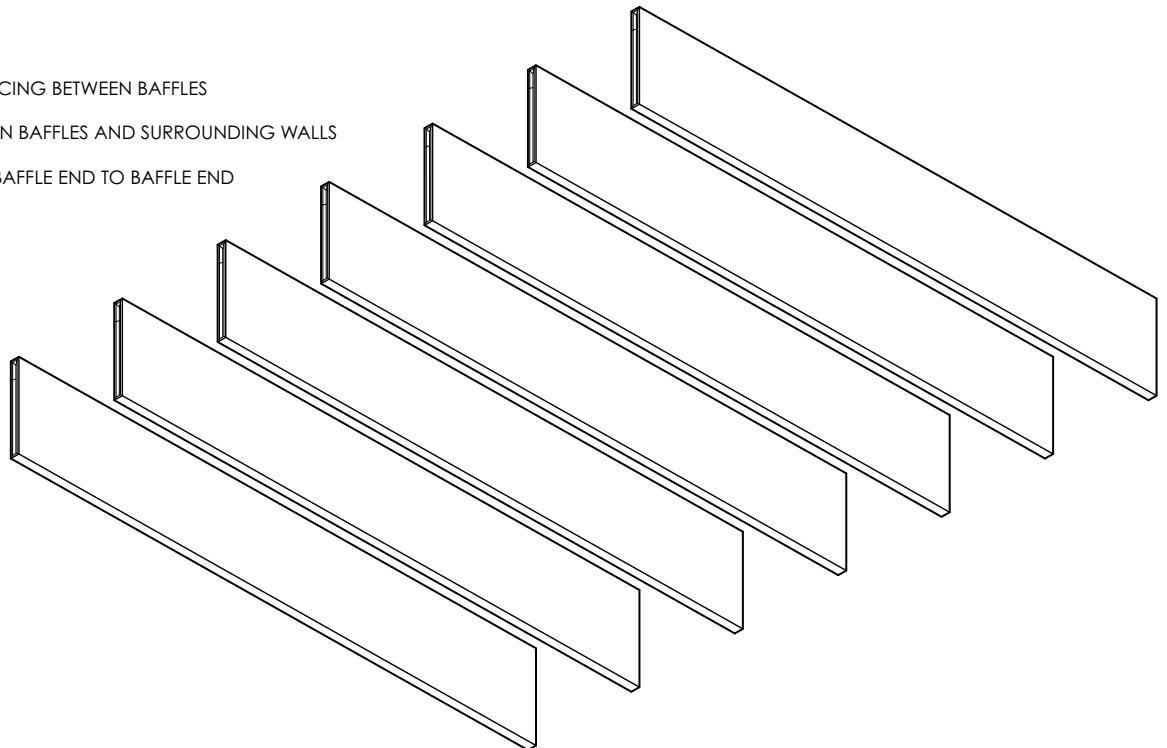

# HARDWARE

## 1/4" - 20 COUPLER CONNECTION



1/4" - 20 THREADED COUPLER

2 COUPLERS PER BAFFLE


FACTORY INSTALLED

COUPLER CAN UNSCREW AND BE RELOCATED IN FIELD

COUPLER CAN ATTACH TO ANY 1/4" - 20 SYSTEM

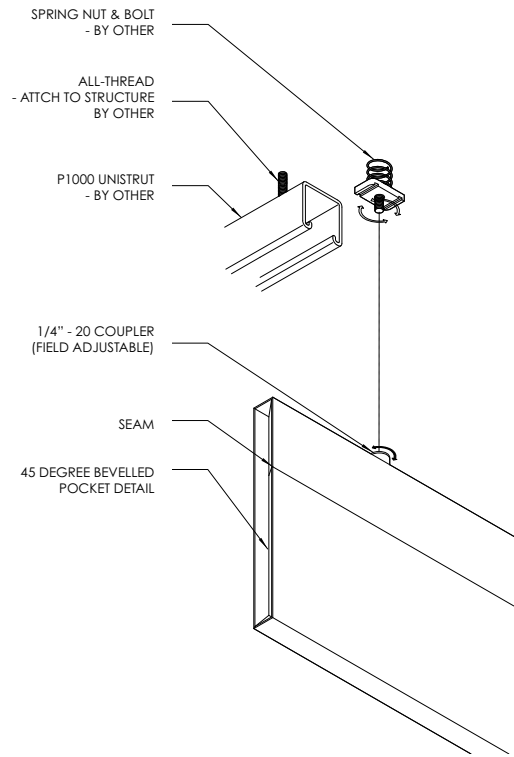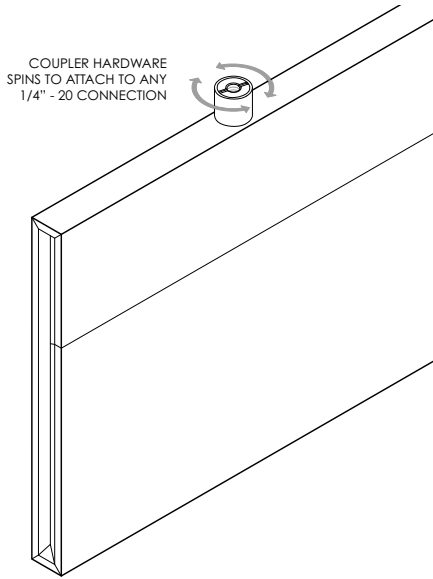

COUPLER INSTALLATION OPTIONS



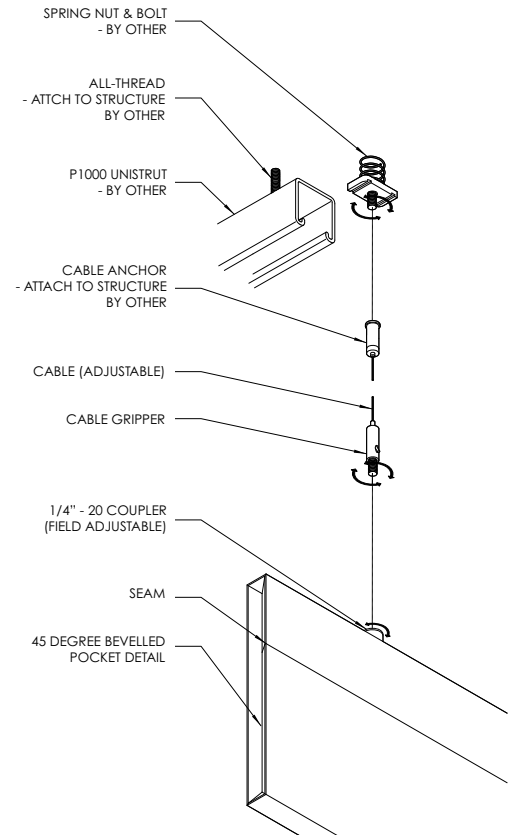


COUPLER INSTALLATION OPTIONS

# HARDWARE CONTINUED


## STRUTCLIP CONNECTION

FOR UNISTRUT INSTALLATION ONLY  
UNISTRUT PROVIDED BY OTHERS  
2 STRUTCLIP HARDWARE PER BAFFLE  
FACTORY INSTALLED  
STRUTSNAP CAN UNSCREW AND BE RELOCATED IN FIELD

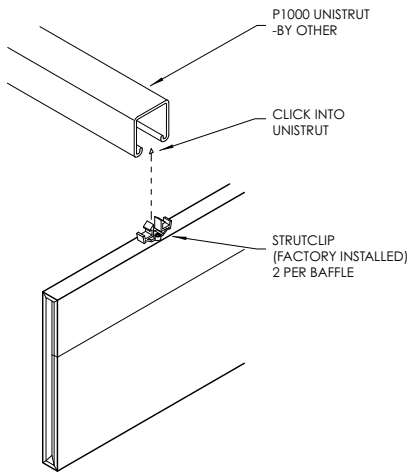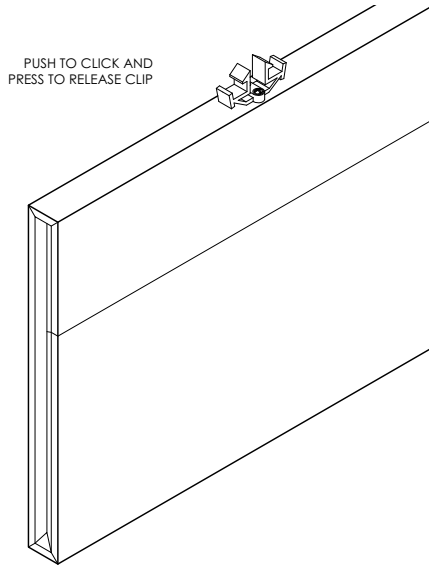


## INSTALLATION

ENGAGE STRUTCLIP  
P1000 UNISTRUT BY OTHER

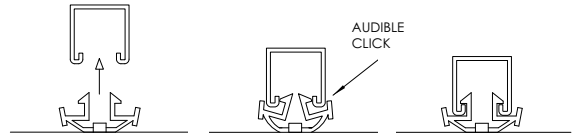

INSERT STRUTCLIP INTO UNISTRUT. YOU WILL HEAR AN AUDIBLE CLICK.

DISENGAGE STRUTCLIP  
P1000 UNISTRUT BY OTHER

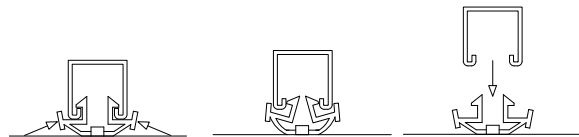

TO REMOVE, SQUEEZE TABS ON BOTH SIDES AND BAFFLE WILL DROP FROM UNISTRUT.  
FOR BAFFLES LONGER THAN 48", TWO INDIVIDUALS ARE REQUIRED FOR BAFFLE REMOVAL.

# ACOUSTICS

NRC values in the United States use the ASTM C423 for an industry wide standard for testing acoustic baffles.

The previous test: ASTM C423-17: "Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method." has been replaced in 2023 with ASTM C423-23.

This latest version removes ambiguity regarding the surface area used to calculate the NRC values.


Previous Soelberg NRC values for hanging baffles have used ASTM C423-17 with the total sound absorption divided by the total surface area of the test surface covered by the hanging baffles, including intermediate spaces. This is more conservative than other calculation methods, but is most representative of the intended use of our baffles.

As of July 2023, Soelberg has adapted all of our NRC tests to the latest method: ASTM C423-23.

The new standard is more precise, avoiding the ambiguity inherent in C423-17. The new C423-23 also includes an additional 12" of space in the baffle array for all tests. This was not included in the previous test standard, and may cause the final NRC value to decrease slightly.

Soelberg strives to have the most precise acoustic data possible, and is the first manufacturer to adopt the new standard to our knowledge.

Please confirm that the ASTM C423-23 method was used when comparing competing products.

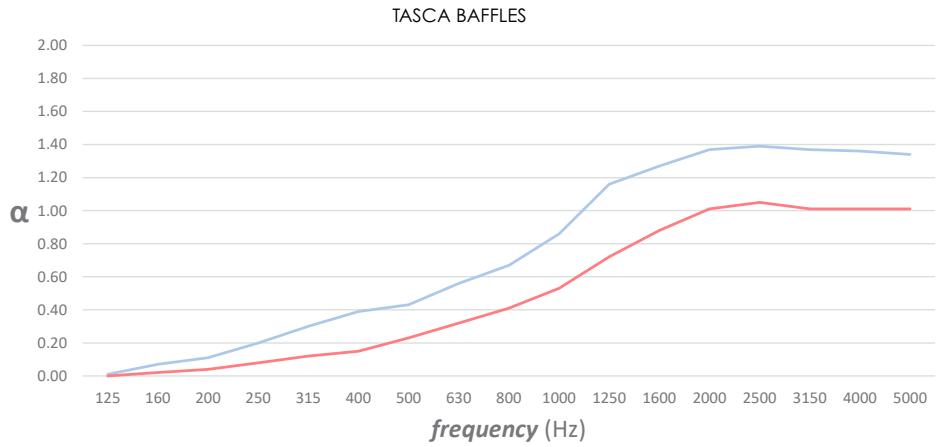

TASCA	SAMPLE FREQUENCY (Hz)				NRC	SAA
	250	500	1000	2000		
10"	0.20	0.43	0.86	1.37	0.70	0.73
6"	0.08	0.23	0.53	1.01	0.45	0.46

## APPARENT NRC RATINGS

NRC values are typically used for flat surfaces of a given surface area, e.g. carpet or wall coverings. When rating hanging objects that are spread out, the 'Apparent NRC' is used.

## WHAT IS NRC?

NRC is an acronym for Noise Reduction Coefficient. This is a convenient single rating for assessing the absorbency of a material. This can be used to predict its efficacy for reducing reverberation within a room. NRC the absorption coefficients at 125 Hz, 250 Hz, 500 Hz and 1,000 Hz, rounded to the nearest 0.05.

## WHY NOT STC?

STC (Sound Transmission Class) is a value used to describe the amount of sound that passes through a barrier. This can be given to a material or an entire wall assembly. If you need to assess how well a barrier can block sound between rooms you'll need to know the STC rating. Acoustic baffles are not used to physically divide rooms, but rather to absorb noise within a room. Problematic noise in a room is called reverberation. This can manifest as droning or ringing sound when people are speaking, or in the worst case: an echo. For this reason, NRC or SAA are the appropriate rating systems for treating reverberation issues.

# ENVIRONMENTAL

## DECLARE, MINDFUL MATERIALS & GREENGUARD GOLD CERTIFIED

We care about the environment and it matters that our materials support healthy and productive interior spaces. We use innovative materials but ensure that they meet the highest level of standards and expectations.

MUTO PET felt core material is 100% recyclable with no added urea formaldehyde.

**Declare.**

