

MUTO BINARIO

acoustic ceiling tile solutions

 SOELBERG



MUTO BINARIO

acoustic ceiling tile solutions

Standard ceiling grid? Take it to the next level with Binario. Optimal acoustic performance and the ability to design the way you want. Available in 21 standard core colors, WOODED print or color print options. Choose from small baffles, large baffles, 2x2 and 2x4 tile sizes and even horizontal or vertical baffles. We've given you everything you need to make ceilings that matter. Make It Cool. Make It Quiet.

SPECIFICATION

CONTENT	100% POLYESTER (PET) FELT	
CORE THICKNESS	1/2" (12MM)	
PATTERN	BINARIO 01 (2x2) BINARIO 01 H (2x4) BINARIO 01 V (2x4)	BINARIO 02 (2x2) BINARIO 02 H (2x4) BINARIO 02 V (2x4)
TILE SIZE	24" x 24" OR 24" x 48" (NOMINAL)	
COLORWAYS	39 STANDARD SOLID COLORS 12 WOODED PRINT GRAINS 4 PRINT COLORS	
WEIGHT	3 LBS EACH (2x2) 7 LBS EACH (2x4)	
ACOUSTICS	0.85 - 0.95 NRC	
FIRE RATING	CLASS A ASTM - E84	
ENVIRONMENTAL	DELCARE, MINDFUL MATERIALS & GREENGUARD GOLD CERTIFIED. MUTO IS PRODUCED FROM 100% RECYCLABLE PET FELT WITH A MINIMUM OF 60% PRE-CONSUMER RECYCLED CONTENT.	
COLORFASTNESS	IN ACCORDANCE WITH ATCC 16.3 OPTION 3 THE COLOR CHANGE TO LIGHT AT 20 AFU WAS 4.5.	
FINISH	MATTE	
APPLICATION	INDOOR USE ONLY	
LEAD TIME	2 - 4 WEEKS (STOCK & PRINT)	
WARRANTY	2 YEARS	

TOLERANCE & MAINTENANCE

PET core is a soft fibrous material. All dimensions and squareness are subject to +/- 1/16" tolerance.


Vacuum to remove dirt and dust. Remove spills or spots immediately using a clean damp cloth. Carpet and fabric cleaners can also be used to clean. (Always test an inconspicuous area first.) Compressed air may be used to dust in difficult or hard-to-reach areas. To disinfect, bleach can be used in accordance with CDC Cleaning & Disinfection instructions. The solution ratio is 5 tablespoons of bleach to 1 gallon of water | 4 teaspoons of bleach to 1 quart of water. Apply solution by spray and wipe off immediately. (Always test in an inconspicuous area first.)




SIZE | BINARIO 01

TILE DIMENSIONS


BINARIO 01 (2x2) - 24" x 24" NOMINAL
BINARIO 01 H & V (2x4) - 24" x 48" NOMINAL

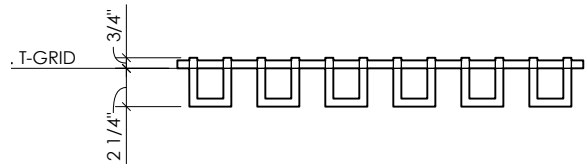


SECTION AA (TYP)

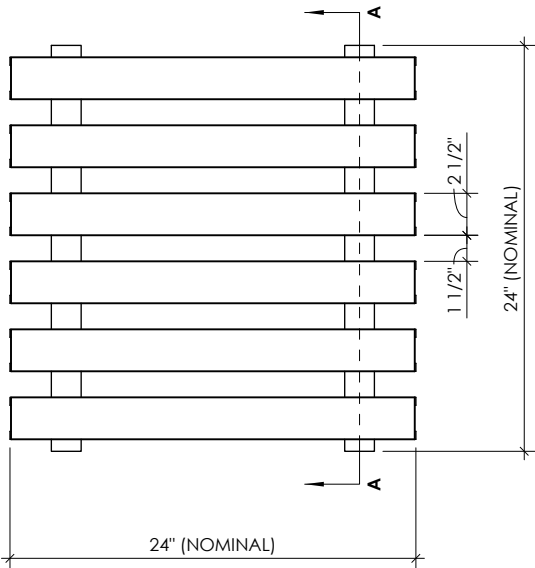

BINARIO 01 (2x2)

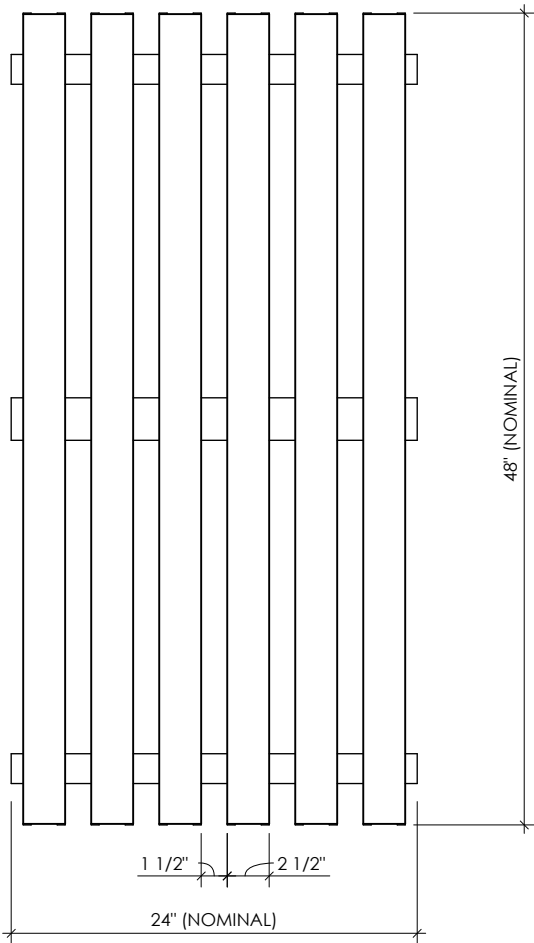

BINARIO 01 V (2x4)

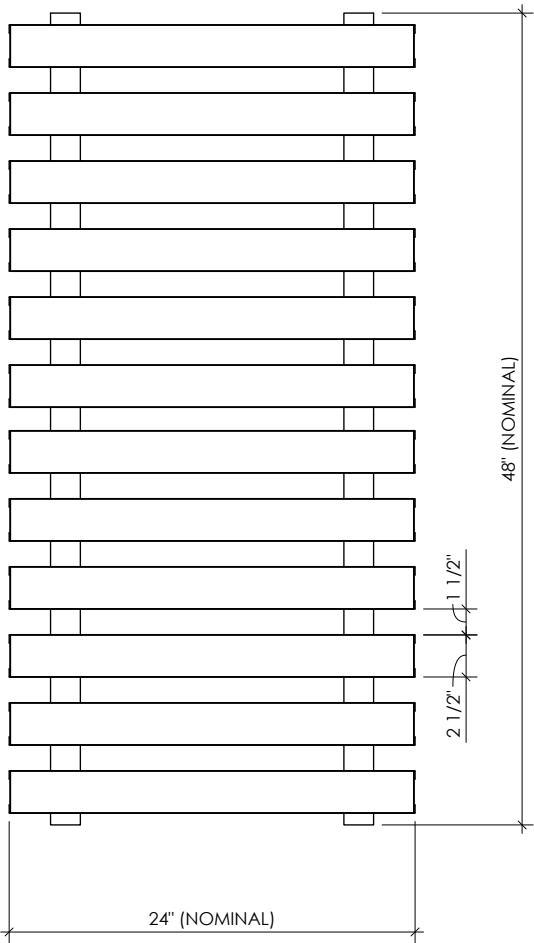


BINARIO 01 H (2x4)


SIZE | BINARIO 02

TILE DIMENSIONS


BINARIO 02 (2x2) - 24" x 24" NOMINAL
BINARIO 02 H & V (2x4) - 24" x 48" NOMINAL

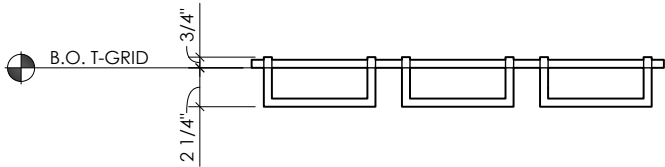


SECTION AA (TYP)

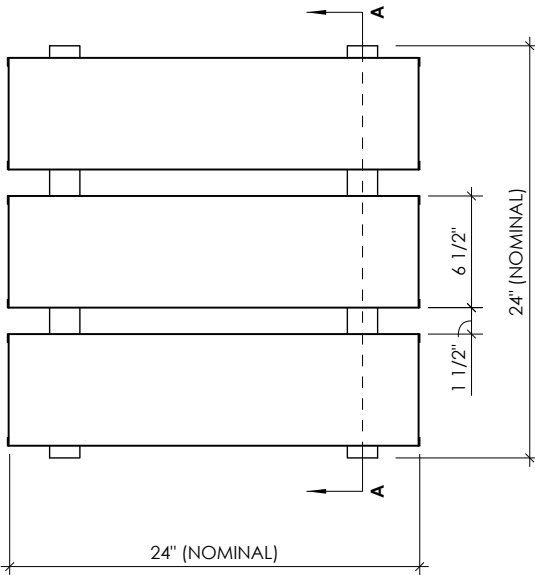

BINARIO 02 (2x2)

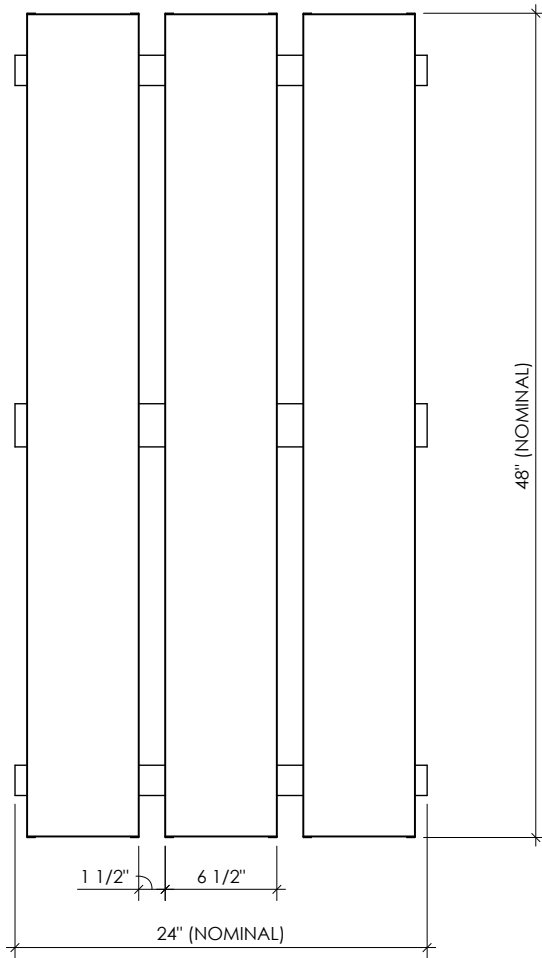

BINARIO 02 V (2x4)

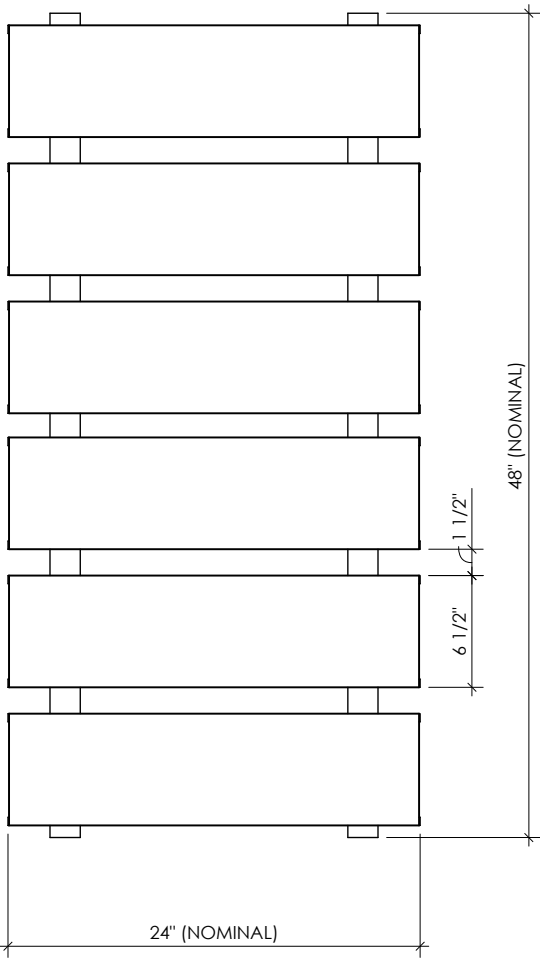

BINARIO 02 H (2x4)

COLOR (STOCK)

MATTE COLOR

27 STANDARD COLORS


CUSTOM PRINT COLORS AVAILABLE

(CONTACT YOUR LOCAL SALES REP)


100% RECYCLABLE PET FELT

TOLERANCES


PET felt is made from 100% recyclable polyester plastic. Variation in depth will occur. Slight and consistent variations in color, density, texture are inherent to this core material and should be expected. Color, density and texture will vary by dye lot. MUTO is made with a 'felting' process which results in a textural heathered effect where the fibers consist of multiple tones and shades.




WHITE




BONE



OATMEAL



CAMEL



SAND




CASHMERE




FOG



LAMB'S EAR




PEWTER



NORDIC KNIT




WINTER WATER



GRAPHITE



BLACK



MIDNIGHT



BLUEBERRY




JUNIPER




SPLASH



STORM



SEAFOAM



SAGE




ARTICHOKE



LICHEN



SUNSHINE



QUAKING ASPEN



CLEMENTINE



CHILI PEPPER



CURRANT

COLOR (NON STOCK)


EXTENDED LEAD TIME

MATTE COLOR

12 STANDARD NON-STOCKED COLORS
CUSTOM PRINT COLORS AVAILABLE
(CONTACT YOUR LOCAL SALES REP)
100% RECYCLABLE PET FELT

TOLERANCES

PET felt is made from 100% recyclable polyester plastic. Variation in depth will occur. Slight and consistent variations in color, density, texture are inherent to this core material and should be expected. Color, density and texture will vary by dye lot. MUTO is made with a 'felling' process which results in a textural heathered effect where the fibers consist of multiple tones and shades.



LATTE



CITY GRAY




BONDI BLUE




MARINE




WASHED DENIM




DEEP JUNGLE




COLLARD GREEN



ASPARAGUS



PECAN



SIENA



RASPBERRY



PINK LEMONADE

WOODED COLOR

MATTE FINISH

12 PRINTED WOODED GRAINS

1/2" CORE THICKNESS

100% RECYCLABLE PET FELT


TOLERANCES

PET felt is made from 100% recyclable polyester plastic. Slight and consistent variations in color, density, texture are inherent to this core material and should be expected. Color, density and texture will vary by dye lot. MUTO is made with a 'felling' process which results in a textural heathered effect where the fibers consist of multiple tones and shades.

Please request physical samples as colors are represented differently with different computer monitors.




WHITE WASHED OAK



BLONDE MAPLE



NATURAL ASH



AGED ASH



SMOKED ASH



AMBER ASH



WARM WALNUT



NATURAL WALNUT




BLACK WALNUT



WEATHERED PINE



CARBON WALNUT



CHARRED OAK

PRINT COLOR

MATTE FINISH

4 PRINTED STANDARD COLORS

1/2" CORE THICKNESS

100% RECYCLABLE PET FELT


CUSTOM PRINT COLORS AVAILABLE

(CONTACT YOUR LOCAL SALES REP)

TOLERANCES

PET felt is made from 100% recyclable polyester plastic. Slight and consistent variations in color, density, texture are inherent to this core material and should be expected. Color, density and texture will vary by dye lot. MUTO is made with a 'felling' process which results in a textural heathered effect where the fibers consist of multiple tones and shades.


Please request physical samples as colors are represented differently with different computer monitors.



DESERT ROSE



DARK CLAY




RIVER




SAP GREEN


ASSEMBLY & INSTALLATION

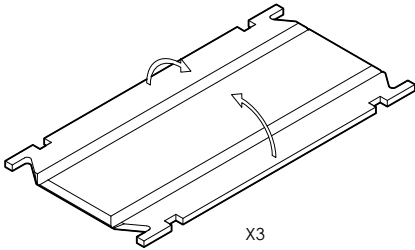


STEP ONE

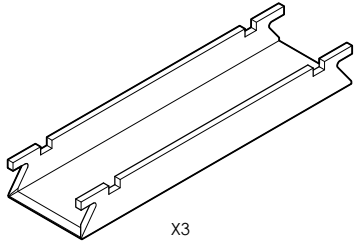


STEP TWO

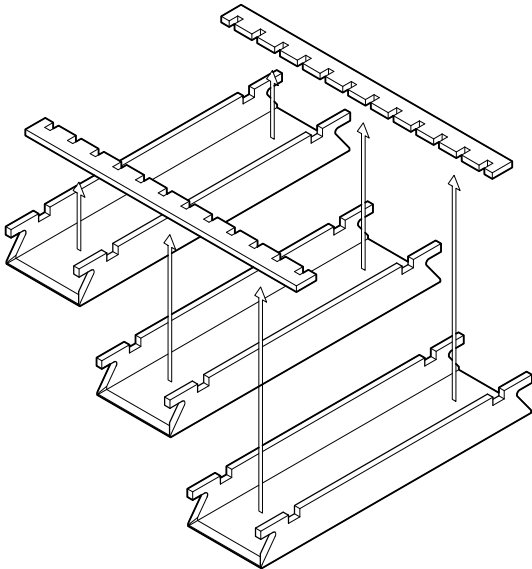

STEP THREE

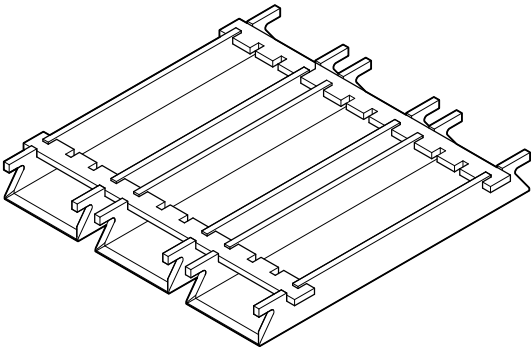

STEP FOUR

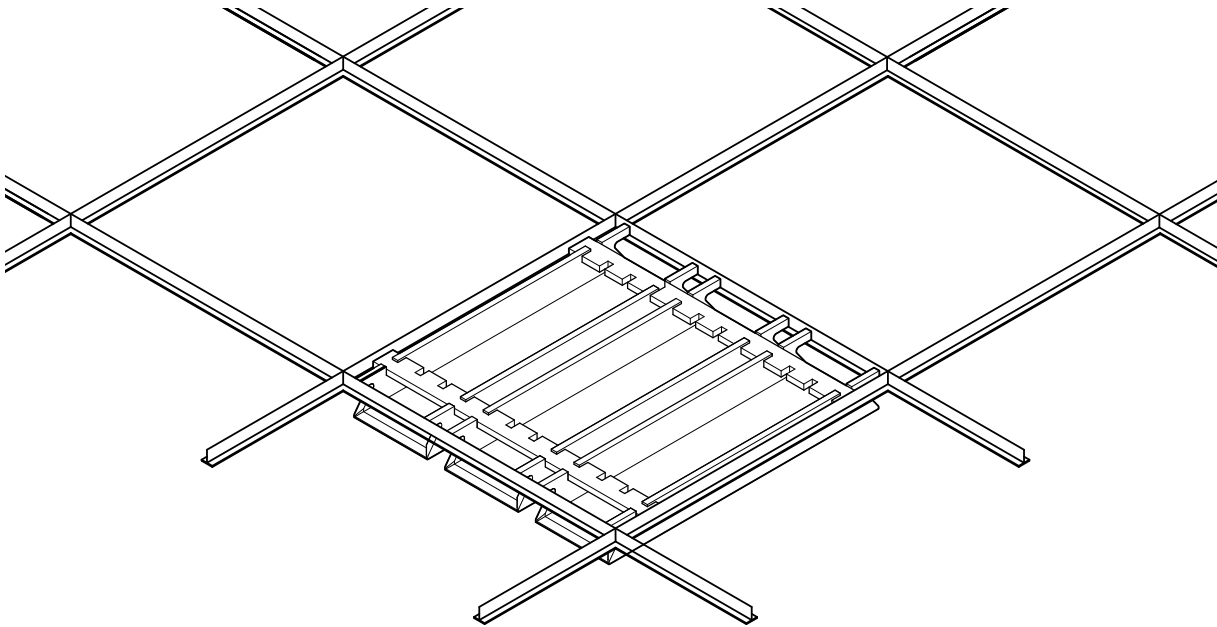

STEP FIVE

FIELD CUTTING INSTRUCTIONS

CUTTING

BINARIO TILES CAN BE CUT AND MODIFIED FOR VARIOUS SITE CONDITIONS. PLEASE NOTE: YOU CANNOT CUT BAFFLES AS THEY WILL LOSE THEIR STRUCTURE. ONLY TILE STRUT MAY BE CUT.

WHEN CUTTING, BE SURE TO USE SHARPENED TOOLS TO AVOID ANY OVERHEATING OF THE PET MATERIAL. A UTILITY KNIFE WITH A NEW BLADE MAY ALSO BE USED. THE FOLLOWING TOOLS ARE RECOMMENDED:

HAND SAW - USE A FINE TOOTHED BLADE. HOLD THE BLADE AT A LOW ANGLE AND CUT SLOWLY WITH REGULAR STROKES


TABLE SAW OR CIRCULAR SAW - USE A FINE TOOTHED BLADE WITH 80 TEETH OR MORE. CARBIDE TIPPED BLADES ARE RECOMMENDED FOR EXTENSIVE CUTTING OR LARGE QUANTITY OF PANELS. ALLOW THE PANEL TO PASS THROUGH THE SAW WITH EVEN PRESSURE AVOIDING UNNECESSARY FORCE. TAKE CAUTION TO AVOID OVERHEATING THE MATERIAL WITH THE BLADE.

JIG SAW - USE A FINE TOOTHED BLADE SUITED FOR FINISH WOODS AND PLASTICS. IF ADJUSTABLE, USE SLOWER SPEEDS AND STEADY MOVEMENT AND PRESSURE. CAREFULLY CLAMP ALL PANELS TO AVOID VIBRATION OR MOVEMENT WHEN CUTTING AND SUPPORT THE PANEL AT ALL TIMES.



CAREFULLY CONFIRM ALL CEILING CONDITIONS TO ENSURE PROPER DIMENSIONS BEFORE CUTTING. USE BLUE TAPE BEFORE MARKING THE FACE OF A TILE WITH PENCIL. MARKS WILL NOT ERASE FROM THE SURFACE.

***PLEASE NOTE: IF YOUR CEILING CONDITIONS DO NOT ALLOW FOR TRIMMING BINARIO AS SHOWN BELOW, PLEASE ORDER SLAB CEILING TILES FOR OTHER CONDITIONS TO ACCOMMODATE MEP (MECHANICAL, ELECTRICAL & PLUMBING) COMPONENTS.

CUT EVENLY ACCROSS BOTH STRUTS
THIS ALLOWS THE TILE TO FIT INTO
PARTIAL 2X2 TILES

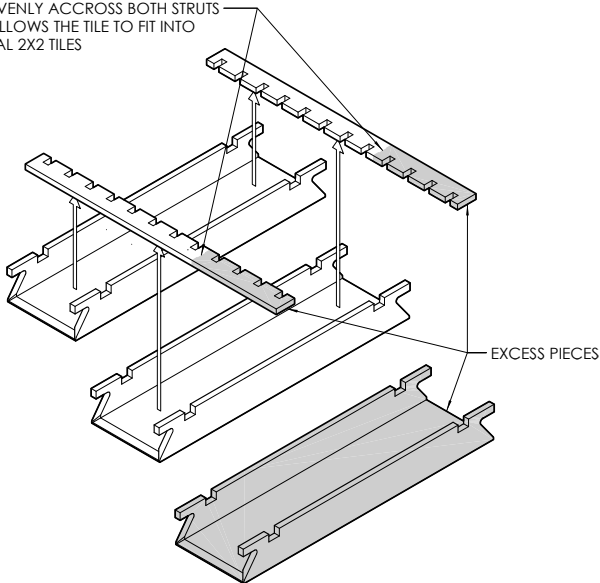










TRIMMED TILE ASSEMBLY

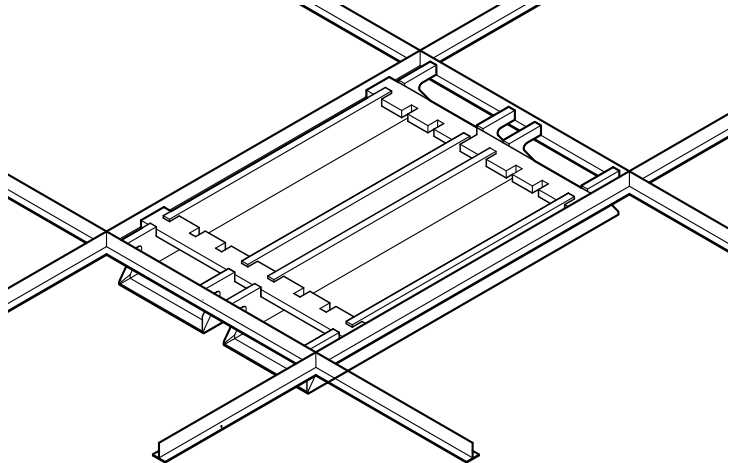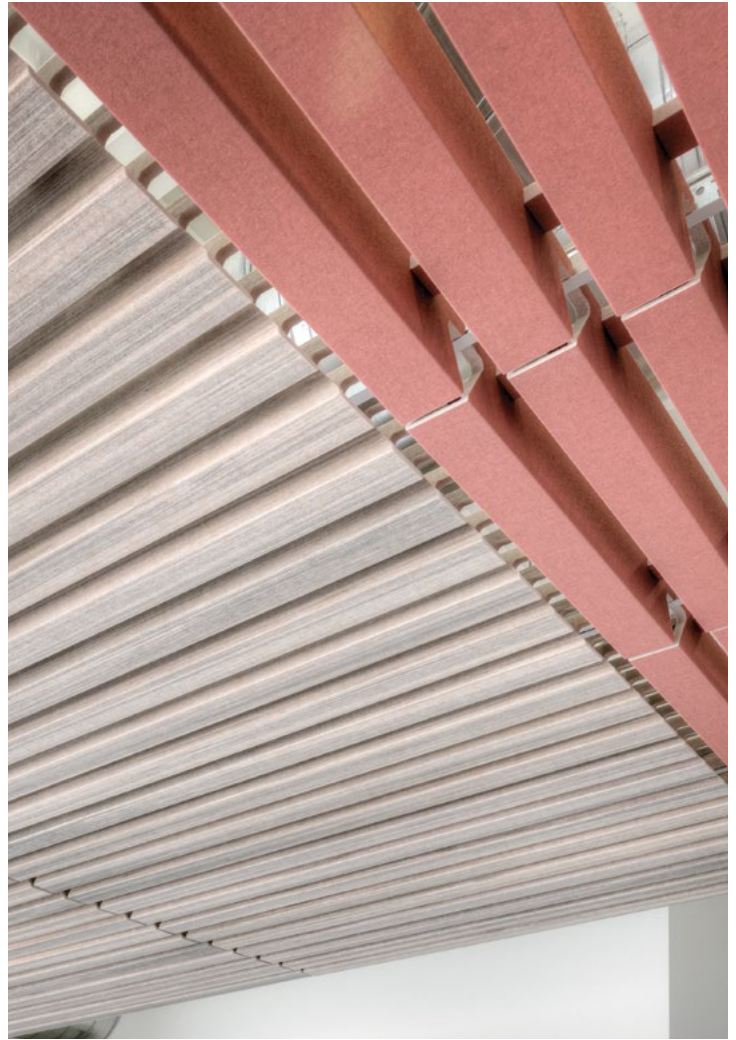

TRIMMED TILE IN T-GRID

PATTERN IDEAS

MIX AND MATCH

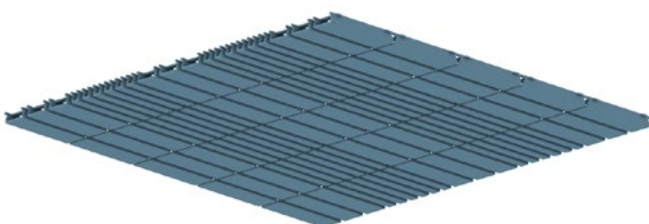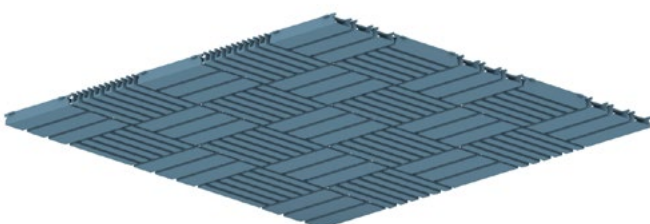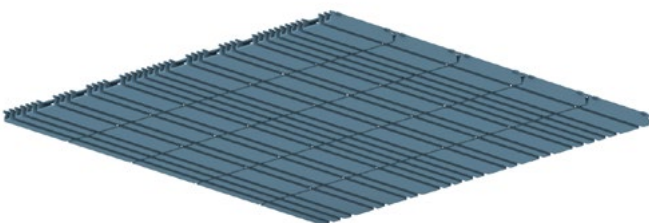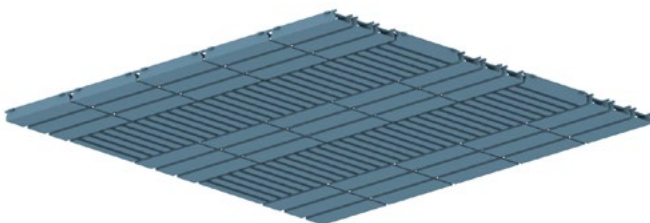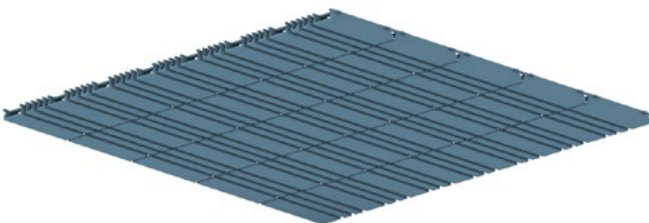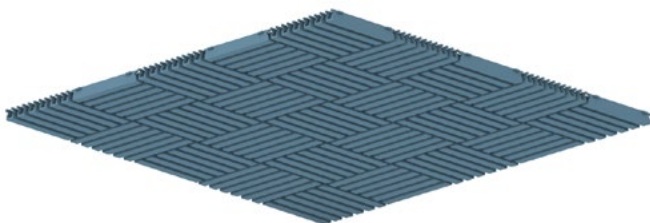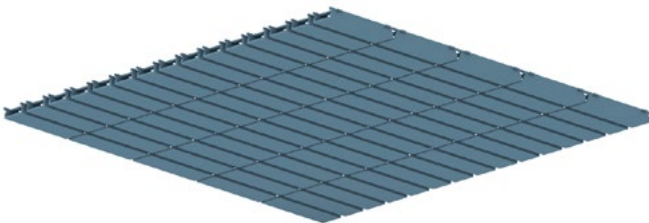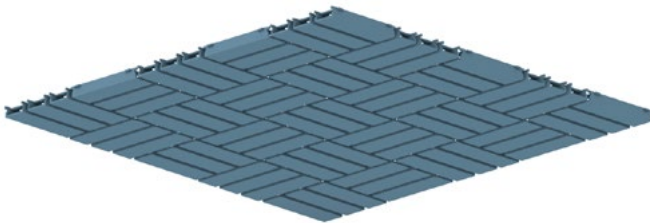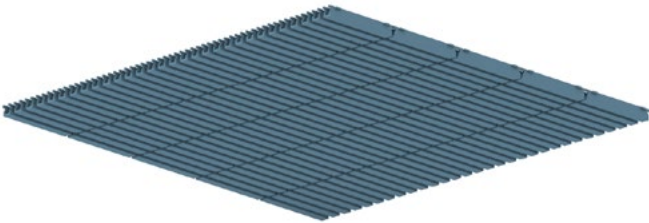

ACOUSTICS

APPARENT NRC RATINGS

NRC values are typically used for flat surfaces of a given surface area, e.g. carpet or wall coverings. When rating hanging objects that are spread out, the 'Apparent NRC' is used.


WHAT IS NRC?

NRC is an acronym for Noise Reduction Coefficient. This is a convenient single rating for assessing the absorbency of a material.

This can be used to predict its efficacy for reducing reverberation within a room. NRC the absorption coefficients at 125 Hz, 250 Hz, 500 Hz and 1,000 Hz, rounded to the nearest 0.05.

WHY NOT STC?

STC (Sound Transmission Class) is a value used to describe the amount of sound that passes through a barrier. This can be given to a material or an entire wall assembly. If you need to assess how well a barrier can block sound between rooms you'll need to know the STC rating. Acoustic baffles are not used to physically divide rooms, but rather to absorb noise within a room. Problematic noise in a room is called reverberation. This can manifest as droning or ringing sound when people are speaking, or in the worst case: an echo. For this reason, NRC or SAA are the appropriate rating systems for treating reverberation issues.

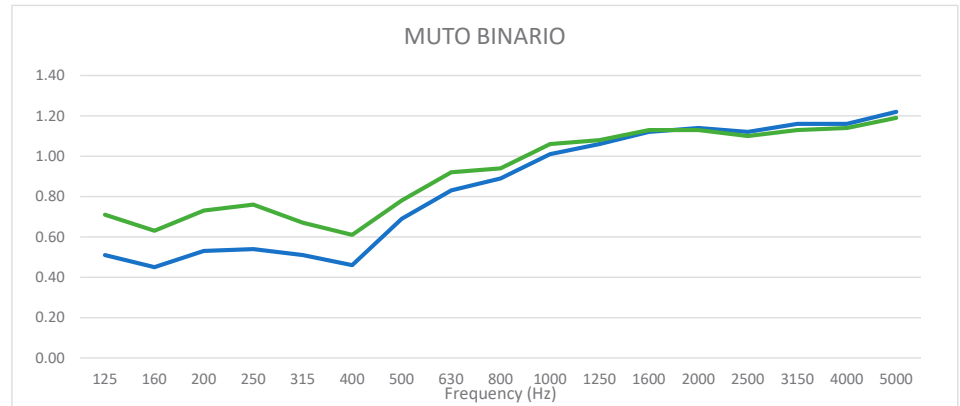

PRODUCT	MOUNTING		SAMPLE FREQUENCY (Hz)				NRC	SAA
			250	500	1000	2000		
01 (SMALL)	E400	α	0.54	0.69	1.01	1.14	0.85	0.83
02 (WIDE)	E400		0.76	0.78	1.06	1.13	0.95	0.91

ENVIRONMENTAL

DECLARE, MINDFUL MATERIALS & GREENGUARD GOLD CERTIFIED

We care about the environment and it matters that our materials support healthy and productive interior spaces. We use innovative materials but ensure that they meet the highest level of standards and expectations.

MUTO PET felt core material is 100% recyclable with no added urea formaldehyde.

Declare.

