

MUTO TONE

acoustic panel solutions

 SOELBERG

MUTO TONE

acoustic panel solutions

MUTO Tone acoustic panels are your solution for creating bold graphic statements that quiet any interior. Made from 2 - 1/2" PET felt panels, MUTO Tone are lightweight, easy to install and can cover any surface. From walls and ceilings and even suspended from the ceiling, let MUTO acoustics do all the sound softening.

Make It Cool. Make It Quiet.

SPECIFICATION

CONTENT	100% POLYESTER (PET) FELT	
CORE THICKNESS	1" (24MM) FELT	
PATTERNS	TONE-ON-TONE (TT)	
	BANDA TT	BOSCO TT
	CUBINI TT	CURVA TT
	LENTO TT	LUCI TT
	PEZZO TT	PISTA TT
	CAMPO TT	GOCCIO TT
	LUOGO TT	SOPRA TT
	TWO-TONE (2T)	
	BANDA 2T	BOSCO 2T
	CUBINI 2T	CURVA 2T
	LENTO 2T	LUCI 2T
	PEZZO 2T	PISTA 2T
	CAMPO 2T	GOCCIO 2T
	LUOGO 2T	SOPRA 2T
COLORWAYS	39 SOLID COLORS & 4 PRINT COLORS	
PANEL SIZE	48" x 96"	
WEIGHT	1 LB SQUARE FOOT	
ACOUSTICS	0.40 NRC OR GREATER	
FIRE RATING	CLASS A ASTM - E84	
ENVIRONMENTAL	DELCARE, MINDFUL MATERIALS & GREENGUARD GOLD CERTIFIED. MUTO IS PRODUCED FROM 100% RECYCLABLE PET FELT WITH A MINIMUM OF 60% PRE-CONSUMER RECYCLED CONTENT.	
LEAD TIME	2 - 3 WEEKS (STOCK COLOR & PRINT)	
WARRANTY	2 YEARS	



TOLERANCES & MAINTENANCE

PET core is a soft fibrous material. All dimensions and squareness are subject to +/- 1/16" tolerance.

Vacuum to remove dirt and dust. Remove spills or spots immediately using a clean damp cloth. Carpet and fabric cleaners can also be used to clean. (Always test an inconspicuous area first.) Compressed air may be used to dust in difficult or hard-to-reach areas.

To disinfect, bleach can be used in accordance with CDC Cleaning & Disinfection instructions. The solution ratio is 5 tablespoons of bleach to 1 gallon of water | 4 teaspoons of bleach to 1 quart of water. Apply solution by spray and wipe off immediately. (Always test in an inconspicuous area first.)

HOW TO SPECIFY

It is easy to specify Tone with four simple steps.

1

CHOOSE YOUR PATTERN

Select from 12 Tone-On-Tone patterns also available as Two-Tone options.

2

SELECT COLOR

With 27 colorways to choose from ranging from bold bright color to soft and heathered neutrals, select the perfect core color for your pattern.

3

SELECT BACKER COLOR

Choose from 27 colorways. Select the same color as the pattern for Tone-On-Tone or a complimentary or contrasting color for Two-Tone.

4

PROVIDE QUANTITY


From one panel to hundreds of panels, we've got your walls covered.




PATTERNS

12 TONE-ON-TONE PATTERNS


48" x 96" PANELS
2 - 1/2" PET PANELS ATTACHED TOGETHER
(CONTACT YOUR LOCAL SALES REP FOR
CUSTOM PATTERN OPTIONS)

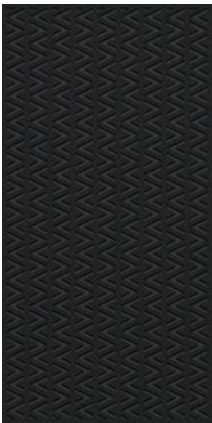

BANDA TT

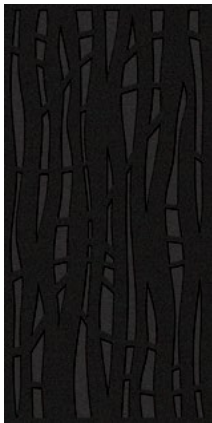


BOSCO TT

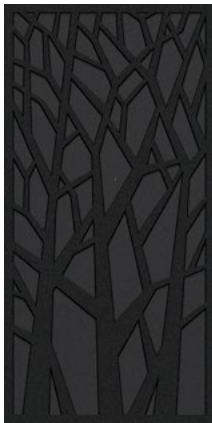


CAMPO TT



CUBINI TT

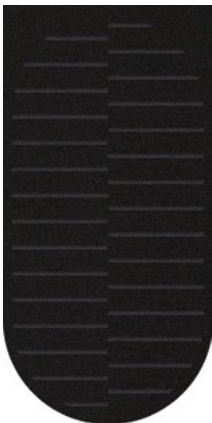

CURVA TT

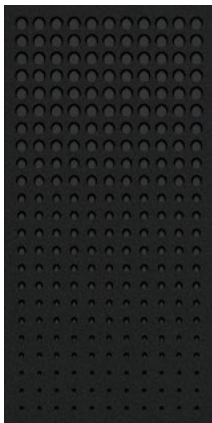


GOCCIO TT




LENTO TT




LUCI TT

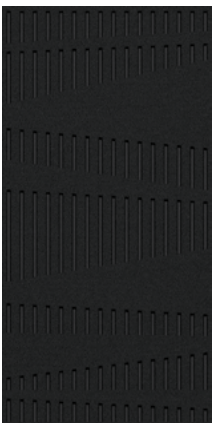


LUOGO TT

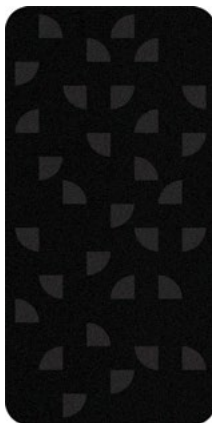

PEZZO TT

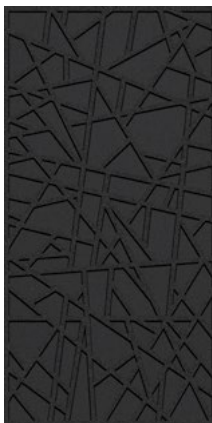

PISTA TT

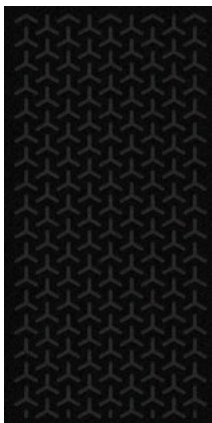

SOPRA TT

PATTERNS

12 TWO-TONE PATTERNS

48" x 96" PANELS

2 - 1/2" PET PANELS ATTACHED TOGETHER

SELECT 2 COLORS | FRONT PANEL &
BACK PANEL

(CONTACT YOUR LOCAL SALES REP FOR
CUSTOM PATTERN OPTIONS)




BANDA TT




BOSCO TT




CAMPO TT

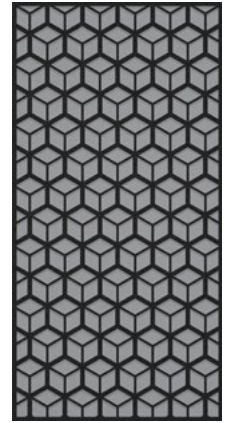


CUBINI TT

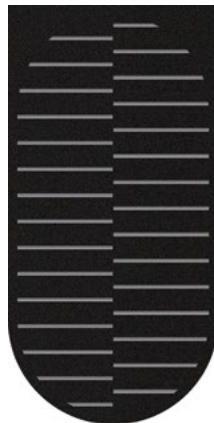


CURVA TT

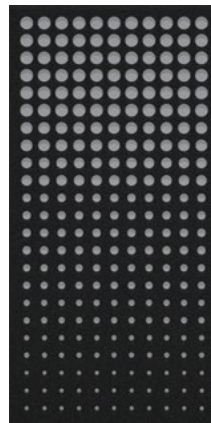


GOCCIO TT

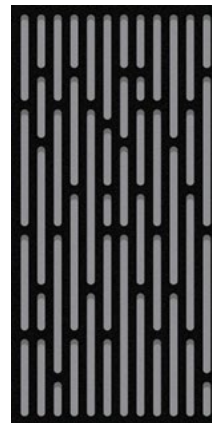

LENTO TT

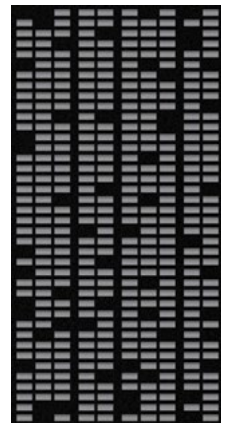

LUCI TT

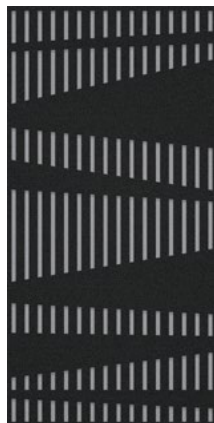


LUOGO TT



PEZZO TT



PISTA TT

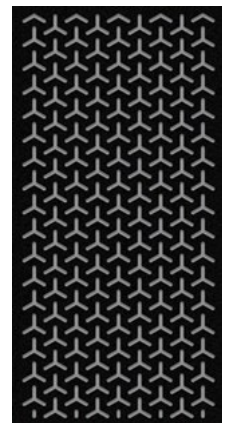

SOPRA TT


COLOR (STOCK)

MATTE COLOR


27 STANDARD COLORS
CUSTOM PRINT COLORS AVAILABLE
(CONTACT YOUR LOCAL SALES REP)
100% RECYCLABLE PET FELT

TOLERANCES


PET felt is made from 100% recyclable polyester plastic. Variation in depth will occur. Slight and consistent variations in color, density, texture are inherent to this core material and should be expected. Color, density and texture will vary by dye lot. MUTO is made with a 'felting' process which results in a textural heathered effect where the fibers consist of multiple tones and shades.



WHITE



BONE



OATMEAL



CAMEL



SAND



CASHMERE



FOG




LAMB'S EAR




PEWTER



NORDIC KNIT



WINTER WATER



GRAPHITE



BLACK



MIDNIGHT



BLUEBERRY



JUNIPER




SPLASH



STORM




SEAFOAM




SAGE



ARTICHOKE



LICHEN



SUNSHINE



QUAKING ASPEN



CLEMENTINE



CHILI PEPPER




CURRANT

COLOR (NON STOCK)

EXTENDED LEAD TIME

MATTE COLOR

12 STANDARD NON-STOCKED COLORS
CUSTOM PRINT COLORS AVAILABLE
(CONTACT YOUR LOCAL SALES REP)
100% RECYCLABLE PET FELT



LATTE



CITY GRAY



BONDI BLUE




MARINE



WASHED DENIM

TOLERANCES

PET felt is made from 100% recyclable polyester plastic. Variation in depth will occur. Slight and consistent variations in color, density, texture are inherent to this core material and should be expected. Color, density and texture will vary by dye lot. MUTO is made with a 'felling' process which results in a textural heathered effect where the fibers consist of multiple tones and shades.




DEEP JUNGLE




COLLARD GREEN



ASPARAGUS



PECAN



SIENA



RASPBERRY



PINK LEMONADE

PRINT COLOR


MATTE FINISH

4 PRINTED STANDARD COLORS
1/2" CORE THICKNESS
100% RECYCLABLE PET FELT
CUSTOM PRINT COLORS AVAILABLE
(CONTACT YOUR LOCAL SALES REP)

TOLERANCES

PET felt is made from 100% recyclable polyester plastic. Slight and consistent variations in color, density, texture are inherent to this core material and should be expected. Color, density and texture will vary by dye lot. MUTO is made with a 'felling' process which results in a textural heathered effect where the fibers consist of multiple tones and shades.


Please request physical samples as colors are represented differently with different computer monitors.



DESERT ROSE



DARK CLAY



RIVER




SAP GREEN

ACOUSTICS

NRC TEST DATA

Higher NRC ratings mean higher sound absorbency. The performance of 1/2" MUTO PET felt core material increases as the depth of air gap increases.

NRC values will vary based on customization and specific installation details. Contact your sales representative to learn more.

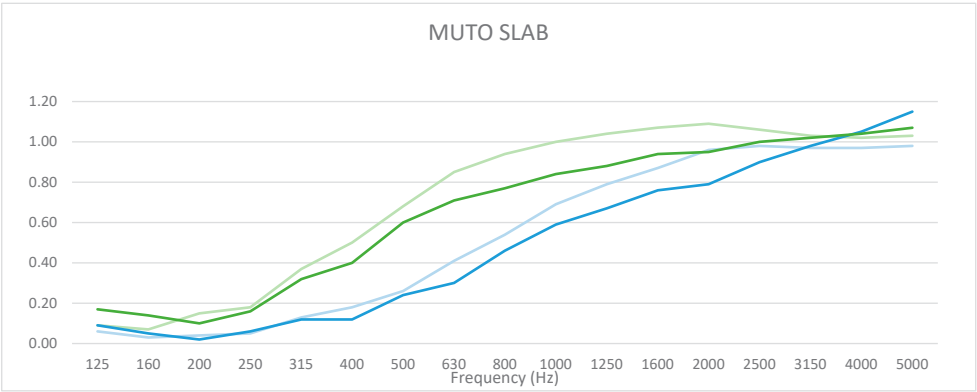

PRODUCT	MOUNTING		SAMPLE FREQUENCY (Hz)				NRC
			250	500	1000	2000	
1/2" MUTO	DIRECT	α	0.06	0.24	0.59	0.79	0.40
	Z-CLIP		0.05	0.26	0.69	0.96	0.50
1" MUTO	DIRECT	α	0.16	0.60	0.84	0.95	0.65
	Z-CLIP		0.18	0.68	1.00	1.09	0.75

ENVIRONMENTAL

DECLARE, MINDFUL MATERIALS & GREENGUARD GOLD CERTIFIED

We care about the environment and it matters that our materials support healthy and productive interior spaces. We use innovative materials but ensure that they meet the highest level of standards and expectations.

MUTO PET felt core material is 100% recyclable with no added urea formaldehyde.



INSTALLATION

ADHESIVE

Use standard construction adhesives (Liquid Nails | Titebond) and apply to the back of the panel maintaining at least a 1" border around the perimeter. Adhere to substrate providing bracing to hold material in place per adhesive curing time instructions.

STAND OFF HARDWARE

Using barrell and cap, secure panel and anchor to substrate as required. Six anchor points recommended for full sized panel.

CABLE SUSPENSION HARDWARE

Select appropriate and necessary anchor and / or screws to fasten top mount to ceiling. Determine location of panel clip (2 clips per panel) and mark and drill for set screw. Tighten set screw to secure clip to panel. Thread wire into gripper and adjust to desired length. Trim excess wire after leveling.

ZCLIP HARDWARE

Attach clips to the back of each panel with screw length to accommodate for the thickness of specified pattern. Anchor to substrate as required.

