

RIPETI

MUTO acoustic
ceiling tile solutions

SOELBERG

RIPETI

MUTO acoustic ceiling tile solutions

Ripeti Acoustic Ceiling Tiles bring texture, dimension, and sound control together in one easy-to-specify system that transforms overlooked ceilings into unforgettable design features. Available in 2' x 2' and 2' x 4' formats with 10 profiles in each size, Ripeti lets you mix creativity with performance. Choose from rich tone-on-tone PET colors, eye-catching two-tone combinations, warm wood grain prints, or unlimited custom print options. Installation is just as effortless, thanks to our exclusive GridClip hardware that clips to 15/16" T-grid systems.

SPECIFICATION

CONTENT	100% POLYESTER (PET) FELT
TILE THICKNESS	1" (2 - 1/2" TILES ATTACHED)
TILE PROFILE	20 PATTERNS
COLOR	39 STANDARD SOLID COLORS 12 WOODED PRINTS CUSTOM PRINTED COLORS
DIMENSIONS	2' x 2' OR 2' x 4'
GRID	15/16" T-GRID
WEIGHT	3 - 4 LBS VARIES BY TILE
ACOUSTICS	TESTING IN PROGRESS
FIRE RATING	CLASS A ASTM - E84
ENVIRONMENTAL	DECLARE, MINDFUL MATERIALS & GREENGUARD GOLD CERTIFIED. MUTO IS PRODUCED FROM 100% RECYCLABLE PET FELT CONTAINING A MINIMUM OF 60% PRE-CONSUMER RECYCLED CONTENT.
FINISH	MATTE
APPLICATION	INDOOR USE ONLY
LEAD TIME	2 WEEKS (STOCK COLOR & PRINT)
WARRANTY	2 YEARS

TOLERANCE & MAINTENANCE

PET core is a soft fibrous material. All dimensions and squareness are subject to +/- 1/16" tolerance.

Vacuum to remove dirt and dust. Remove spills or spots immediately using a clean damp cloth. Carpet and upholstery cleaners can also be used to clean. (Always test an inconspicuous area first.) Compressed air may be used to dust in difficult or hard-to-reach areas. To disinfect, bleach can be used in accordance with CDC Cleaning & Disinfection instructions. The solution ratio is 5 tablespoons of bleach to 1 gallon of water | 4 teaspoons of bleach to 1 quart of water. Spray the solution onto the surface and wipe clean immediately. (Always test in an inconspicuous area first.)



HOW TO SPECIFY

It is easy to specify Ripeti ceiling tiles with four simple steps.

1

SELECT YOUR PROFILES

Rotate tiles and repeat for statement-making ceiling patterns. Or, combine various profiles for even more ceiling creativity.

2

DETERMINE TILE SIZE

Choose between 2' x 2' tiles or 2' x 4' tiles or combine both sizes for even more dynamic ceiling designs.

3


CHOOSE YOUR COLORS

Select Tone-on-Tone or Two-Tone color combinations, printed wood grains, or custom printed color for unforgettable tile configurations.

4

PROVIDE TILE QUANTITY

Whether you need one tile or hundreds of tiles, we have your ceilings covered. Ripeti tiles install easily into standard 15/16" T-grid using GridClip hardware.

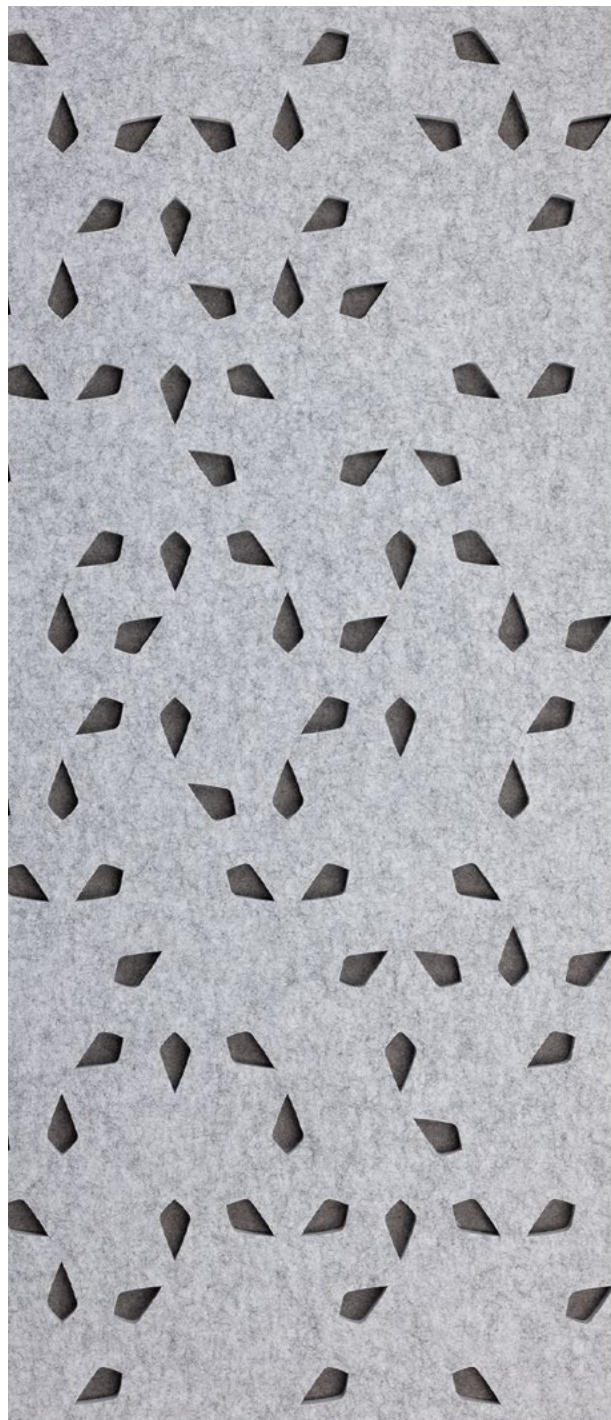

TILE PROFILE

TONE-ON-TONE 2x2 TILES

SIZE: 2' x 2' (NOMINAL)

TILE THICKNESS: 1"


REPEAT, ROTATE, OR COMBINE TILE PROFILES
FOR ENDLESS PATTERN OPTIONS



CAMBIO 01 TT (2x2)



CAMBIO 02 TT (2x2)




CAMBIO 03 TT (2x2)




MODO 01 TT (2x2)




MODO 02 TT (2x2)



MODO 03 TT (2x2)




INTERO TT (2x2)



PARTE 01 TT (2x2)



PARTE 02 TT (2x2)



PARTE 03 TT (2x2)

TILE PROFILE

TWO-TONE 2x2 TILES

SIZE: 2' x 2' (NOMINAL)

TILE THICKNESS: 1"

REPEAT, ROTATE, OR COMBINE TILE PROFILES
FOR ENDLESS PATTERN OPTIONS




CAMBIO 01 TT (2x2)



CAMBIO 02 TT (2x2)



CAMBIO 03 TT (2x2)



MODO 01 TT (2x2)




MODO 02 TT (2x2)




MODO 03 TT (2x2)




INTERO TT (2x2)



PARTE 01 TT (2x2)



PARTE 02 TT (2x2)



PARTE 03 TT (2x2)


TILE PROFILE

TONE-ON-TONE 2x4 TILES


SIZE: 2' x 4' (NOMINAL)

TILE THICKNESS: 1"


REPEAT, ROTATE, OR COMBINE TILE PROFILES
FOR ENDLESS PATTERN OPTIONS

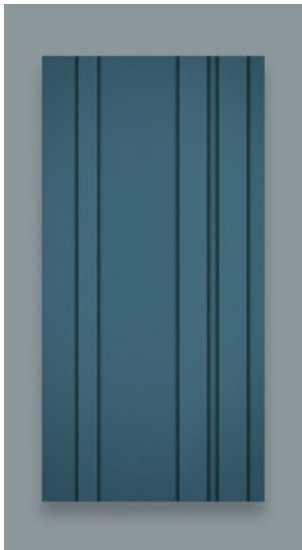

CAMBIO 01 TT (2x4)

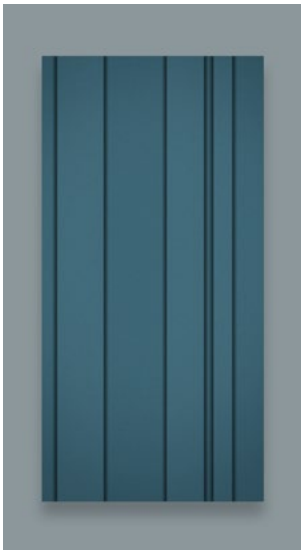


CAMBIO 02 TT (2x4)

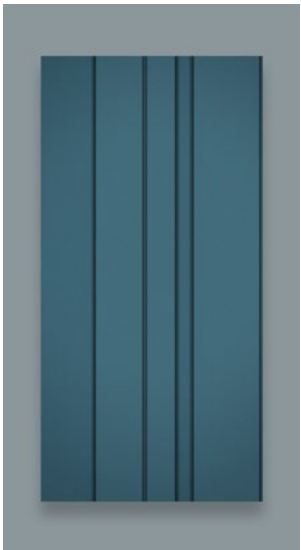


CAMBIO 03 TT (2x4)



MODO 01 TT (2x4)

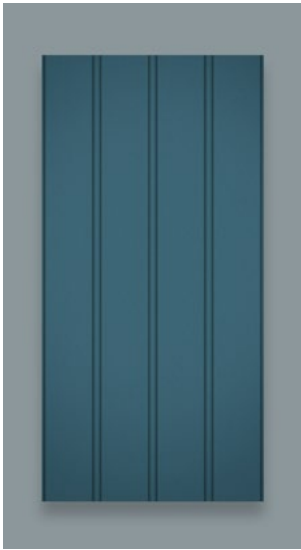


MODO 02 TT (2x4)

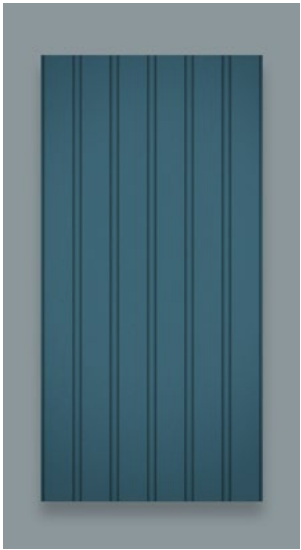


MODO 03 TT (2x4)




CONO TT (2x2)

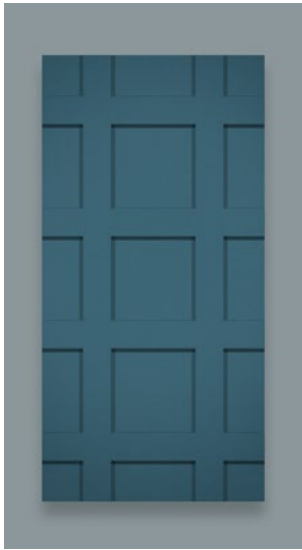

PARTE 01 TT (2x4)

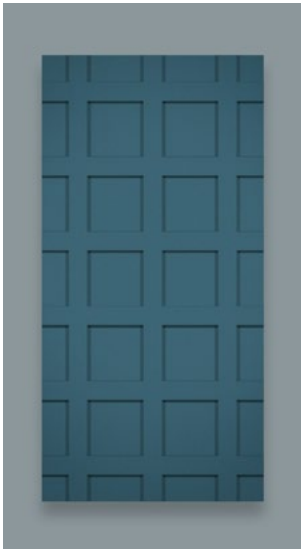

PARTE 02 TT (2x4)

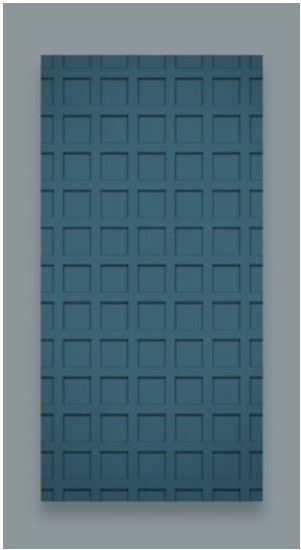

PARTE 03 TT (2x4)


TILE PROFILE

TWO-TONE 2x4 TILES


SIZE: 2' x 4' (NOMINAL)

TILE THICKNESS: 1"


REPEAT, ROTATE, OR COMBINE TILE PROFILES
FOR ENDLESS PATTERN OPTIONS

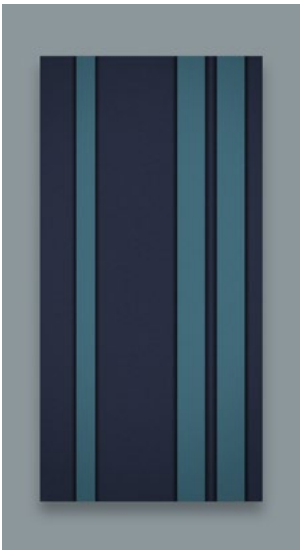


CAMBIO 01 TT (2x4)

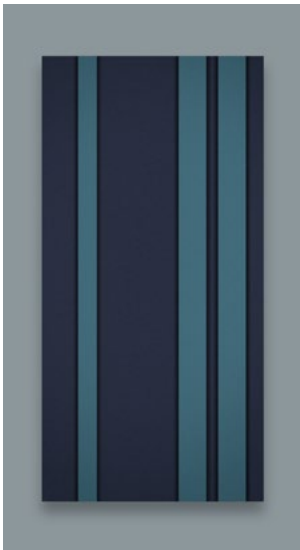

CAMBIO 02 TT (2x4)

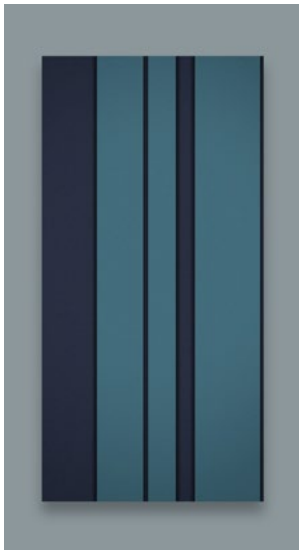


CAMBIO 03 TT (2x4)

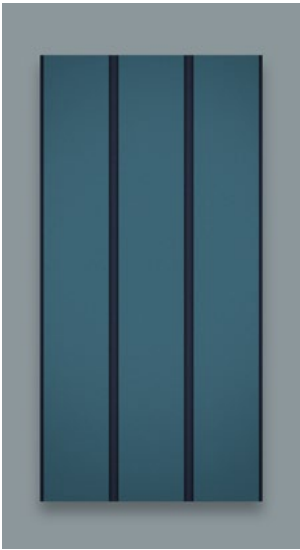

MODO 01 TT (2x4)




MODO 02 TT (2x4)

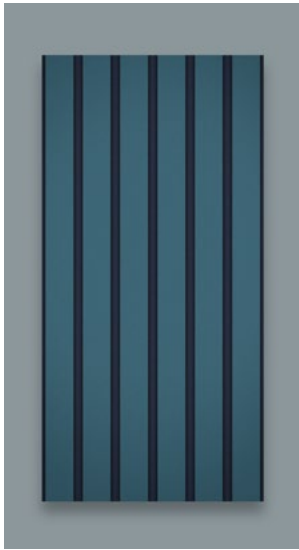


MODO 03 TT (2x4)




CONO TT (2x2)

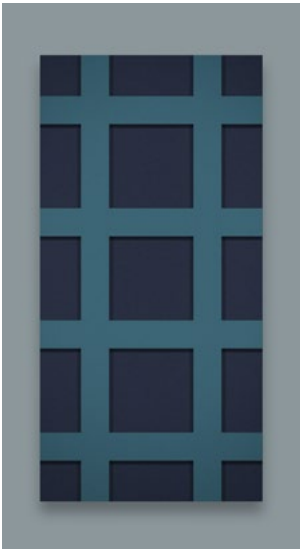

PARTE 01 TT (2x4)

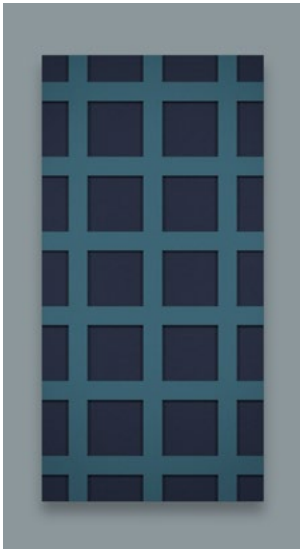

PARTE 02 TT (2x4)

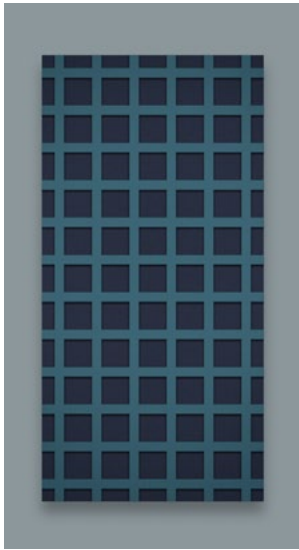

PARTE 03 TT (2x4)


TILE DIMENSIONS

CAMBIO 01 - 03 (2x2) AND (2x4)

SIZE: 2' x 2' AND 2' x 4' (NOMINAL)

TILE THICKNESS: 1"

REPEAT, ROTATE, OR COMBINE
TILE PROFILES FOR ENDLESS
PATTERN OPTIONS

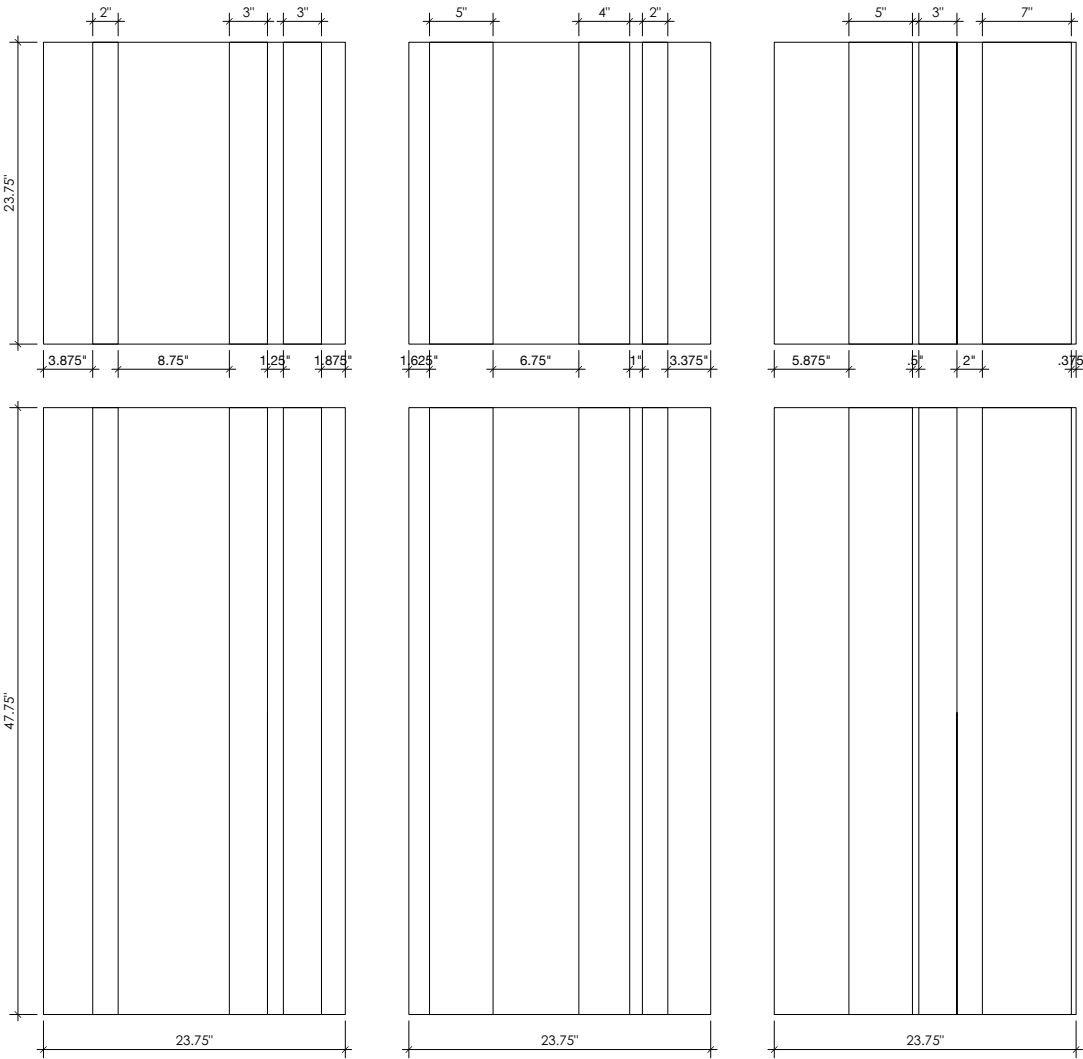

CAMBIO 01 (2x2) AND (2x4)
WEIGHT: 2.30 LBS (2x2)
4.70 LBS (2x4)

CAMBIO 02 (2x2) AND (2x4)
WEIGHT: 3.10 LBS (2x2)
6.30 LBS (2x4)

CAMBIO 03 (2x2) AND (2x4)
WEIGHT: 3.20 LBS (2x2)
6.50 LBS (2x4)


TILE DIMENSIONS

INTERO (2x2)
CONO (2x4)


SIZE: 2' x 2' AND 2' x 4' (NOMINAL)

TILE THICKNESS: 1"

REPEAT, ROTATE, OR COMBINE
TILE PROFILES FOR ENDLESS
PATTERN OPTIONS

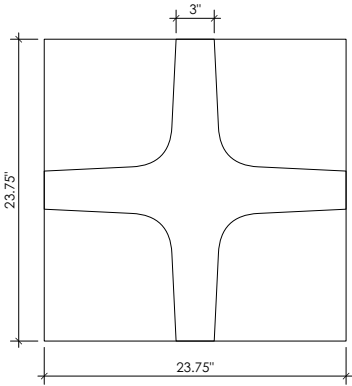

INTERO (2x2)
WEIGHT: 2.70 LBS

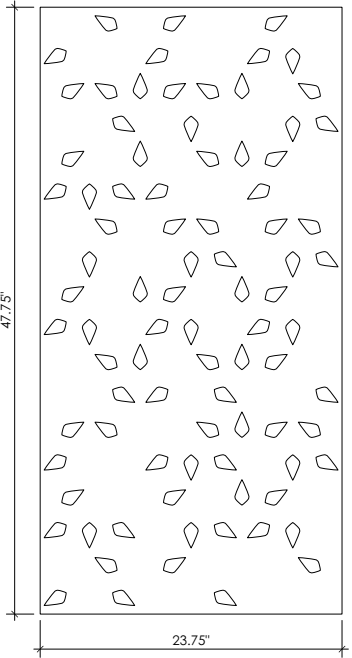

CONO (2x4)
WEIGHT: 8.20 LBS


TILE DIMENSIONS

MODO 01 - 03
(2x2) AND (2x4)

SIZE: 2' x 2' AND 2' x 4' (NOMINAL)

TILE THICKNESS: 1"

REPEAT, ROTATE, OR COMBINE
TILE PROFILES FOR ENDLESS
PATTERN OPTIONS

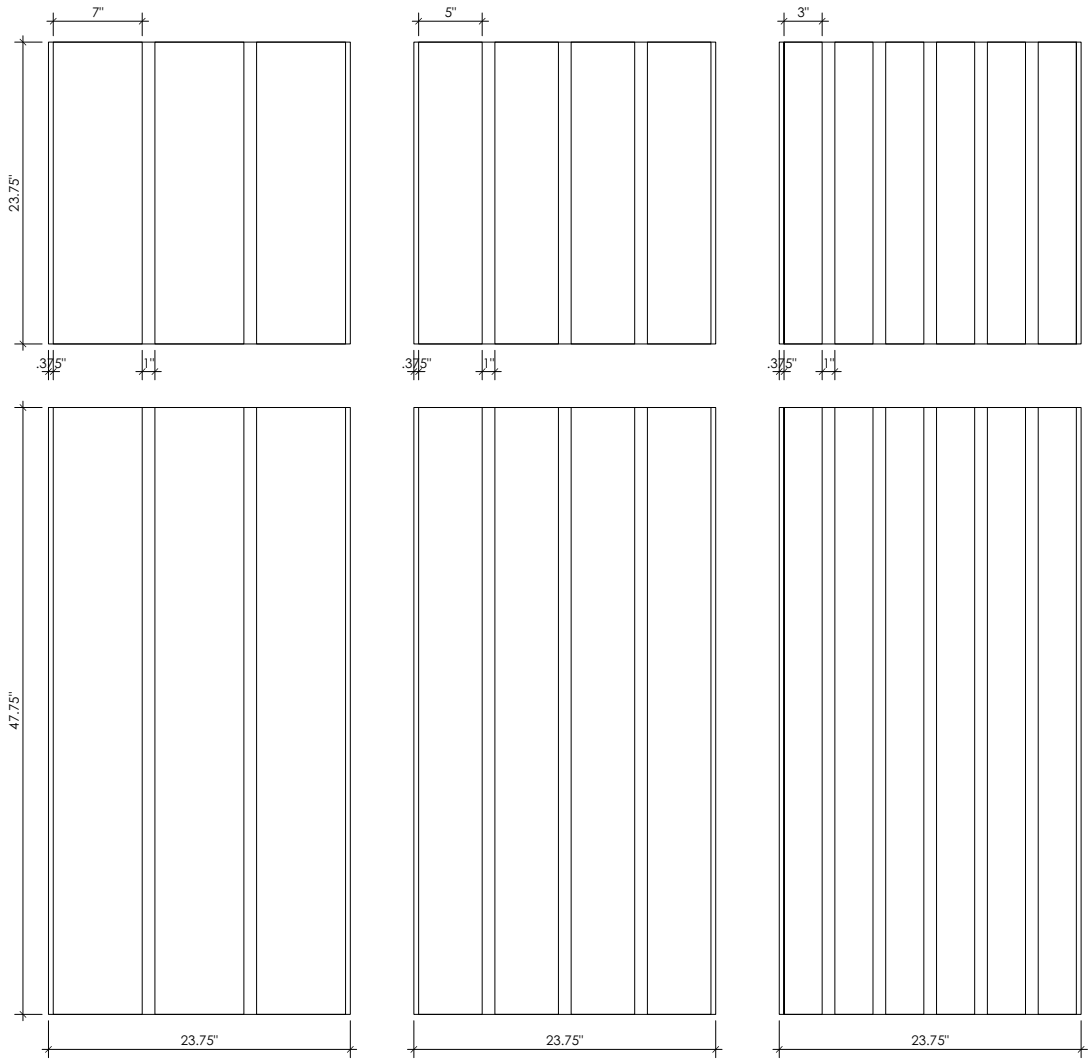

MODO 01 (2x2) AND (2x4)
WEIGHT: 4.00 LBS (2x2)
8.10 LBS (2x4)

MODO 02 (2x2) AND (2x4)
WEIGHT: 3.90 LBS (2x2)
7.90 LBS (2x4)

MODO 03 (2x2) AND (2x4)
WEIGHT: 3.50 LBS (2x2)
7.00 LBS (2x4)







TILE DIMENSIONS

PARTE 01 - 03
(2x2) AND (2x4)

SIZE: 2' x 2' AND 2' x 4' (NOMINAL)

TILE THICKNESS: 1"

REPEAT, ROTATE, OR COMBINE
TILE PROFILES FOR ENDLESS
PATTERN OPTIONS

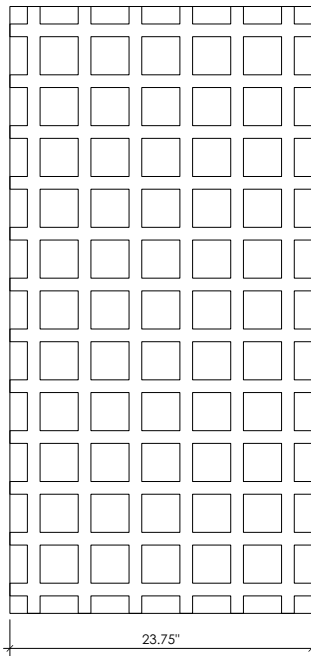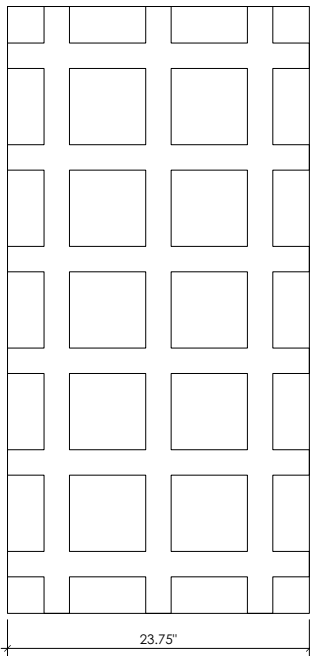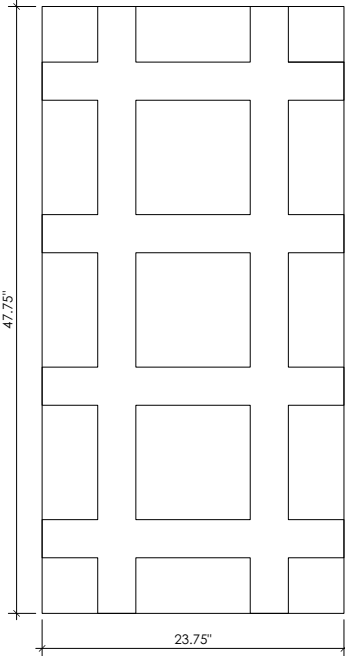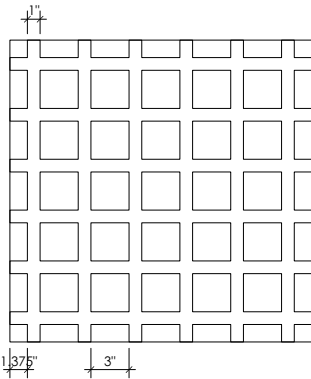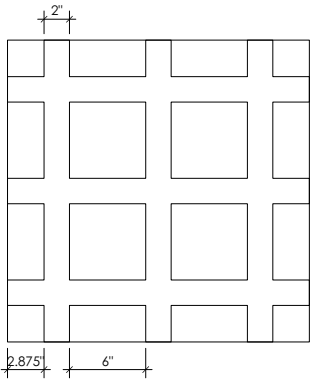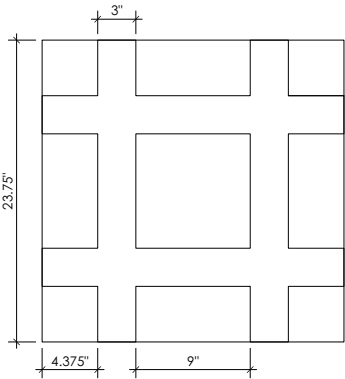

PARTE 01 (2x2) AND (2x4)
WEIGHT: 3.10 LBS (2x2)
6.20 LBS (2x4)

PARTE 02 (2x2) AND (2x4)
WEIGHT: 3.10 LBS (2x2)
6.20 LBS (2x4)

PARTE 03 (2x2) AND (2x4)
WEIGHT: 3.10 LBS (2x2)
6.20 LBS (2x4)

COLOR (STOCK)

MATTE COLOR

27 STANDARD COLORS


CUSTOM PRINT COLORS AVAILABLE

(CONTACT YOUR LOCAL SALES REP)


100% RECYCLABLE PET FELT

TOLERANCES


PET felt is made from 100% recyclable polyester plastic. Variation in depth will occur. Slight and consistent variations in color, density, texture are inherent to this core material and should be expected. Color, density and texture will vary by dye lot. MUTO is made with a 'felting' process which results in a textural heathered effect where the fibers consist of multiple tones and shades.




WHITE




BONE



OATMEAL



CAMEL



SAND




CASHMERE




FOG



LAMB'S EAR




PEWTER



NORDIC KNIT




WINTER WATER



GRAPHITE



BLACK



MIDNIGHT



BLUEBERRY




JUNIPER




SPLASH



STORM



SEAFOAM




SAGE




ARTICHOKE



LICHEN




SUNSHINE



QUAKING ASPEN



CLEMENTINE



CHILI PEPPER



CURRANT

COLOR (NON-STOCK)


EXTENDED LEAD TIME

MATTE COLOR

12 STANDARD NON-STOCKED COLORS
CUSTOM PRINT COLORS AVAILABLE
(CONTACT YOUR LOCAL SALES REP)
100% RECYCLABLE PET FELT

TOLERANCES

PET felt is made from 100% recyclable polyester plastic. Variation in depth will occur. Slight and consistent variations in color, density, texture are inherent to this core material and should be expected. Color, density and texture will vary by dye lot. MUTO is made with a 'felling' process which results in a textural heathered effect where the fibers consist of multiple tones and shades.



LATTE



CITY GRAY




BONDI BLUE




MARINE



WASHED DENIM




DEEP JUNGLE




COLLARD GREEN



ASPARAGUS



PECAN



SIENA



RASPBERRY



PINK LEMONADE

WOODED COLOR

MATTE FINISH

12 PRINTED WOOD GRAINS
1/2" PET CORE THICKNESS
100% RECYCLABLE PET FELT


TOLERANCES

PET felt is made from 100% recyclable polyester plastic. Slight and consistent variations in color, density, texture are inherent to this core material and should be expected. Color, density and texture will vary by dye lot. MUTO is made with a 'felling' process which results in a textural heathered effect where the fibers consist of multiple tones and shades.

Please request physical samples as colors are represented differently with different computer monitors.




WHITE WASHED OAK



BLONDE MAPLE




NATURAL ASH



AGED ASH



SMOKED ASH



AMBER ASH



WARM WALNUT



NATURAL WALNUT



BLACK WALNUT



WEATHERED PINE




CARBON WALNUT




CHARRED OAK

TILE GRAIN DIRECTION


GRAIN FOLLOWS ARROW

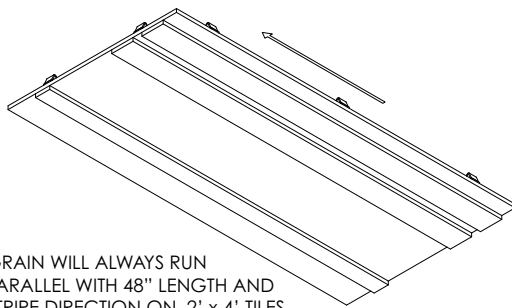

GRAIN WILL ALWAYS RUN
PARALLEL WITH 48" LENGTH AND
STRIPE DIRECTION ON 2' x 4' TILES

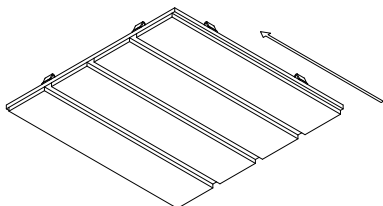

GRAIN WILL ALWAYS RUN
PARALLEL WITH STRIPE DIRECTION
ON 2' x 2' TILES

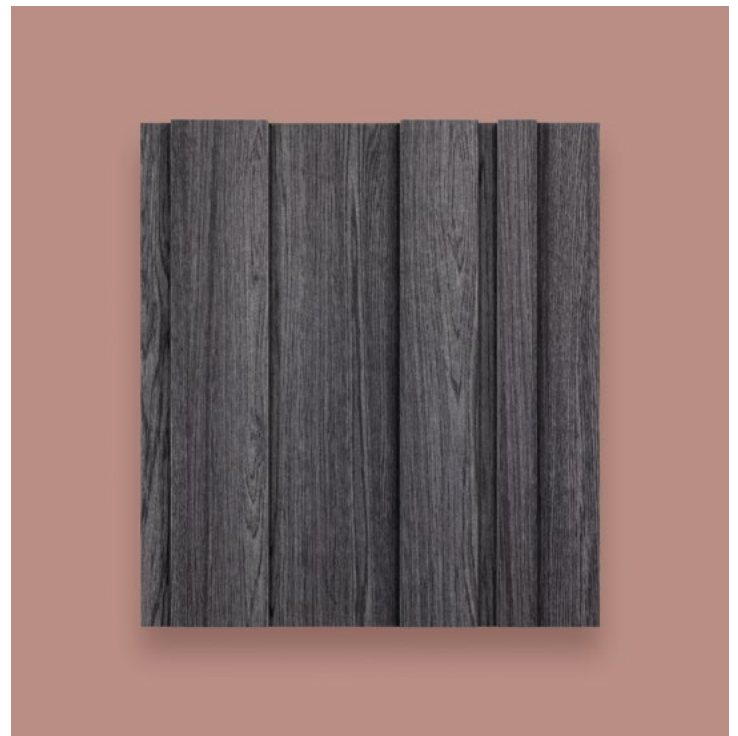


INSTALLATION

GRIDCLIP HARDWARE CLIPS TO 15/16" T-GRID

2' x 2' OR 2' x 4' (NOMINAL) RIPETI TILES

RIPETI TILES CAN BE FIELD CUT AND HARDWARE RELOCATED

RIPETI TILES CAN BE CUT FOR LIGHTING. CUTTING FOR LIGHTING IS PERFORMED IN FIELD. SOELBERG DOES NOT PROVIDE LIGHTING. ALL LIGHTING MUST BE ANCHORED TO THE DECK. RIPETI TILES DO NOT SUPPORT THE WEIGHT OF LIGHTING FIXTURES OR OTHER MEP COMPONENTS.

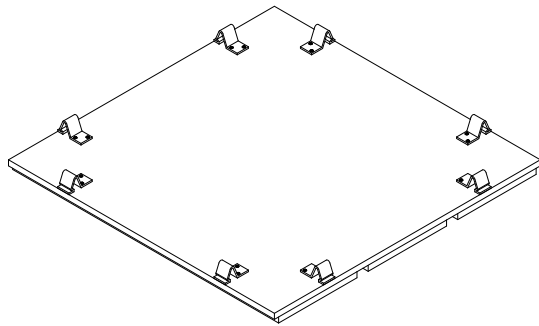


GRIDCLIP HARDWARE CLIPS TO 15/16" T-GRID AND RIPETI TILES HANG BELOW THE T-GRID.

EACH 24" x 24" TILE COMES WITH 8 FACTORY ATTACHED GRIDCLIP HARDWARE. EACH 24" x 48" TILE COMES WITH 10 FACTORY ATTACHED GRIDCLIP HARDWARE.

TO INSTALL, LIFT TILE TO T-GRID ALIGNED WITH THE OPENING. PUSH GRIDCLIP INTO T-GRID UNTIL YOU HEAR AN AUDIBLE CLICK. PUSH AT EACH GRIDCLIP LOCATION TO ENSURE TILE IS FULLY ATTACHED TO T-GRID.

THERE WILL ALWAYS BE A 1/4" REVEAL BETWEEN TILES AT EACH END.

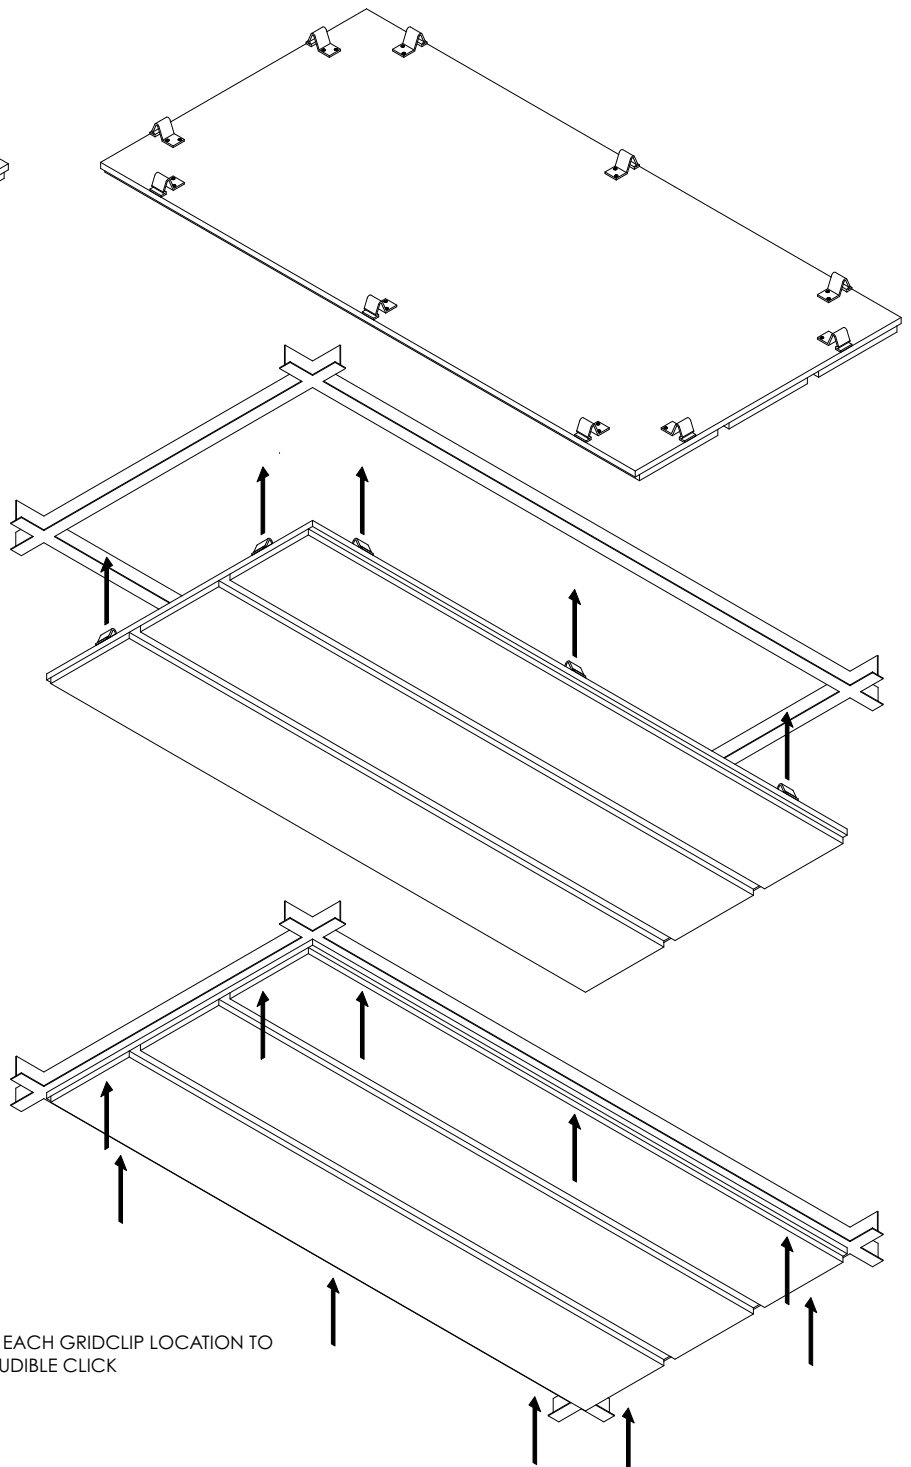

PUSH UP AT EACH GRIDCLIP LOCATION TO HEAR AN AUDIBLE CLICK

CUTTING

TILE TRIMMING INSTRUCTIONS

RIPETI TILES CAN BE CUT AND MODIFIED FOR VARIOUS SITE CONDITIONS.

WHEN CUTTING, BE SURE TO USE SHARP TOOLS TO AVOID ANY OVERHEATING OF THE PET MATERIAL. A UTILITY KNIFE WITH A NEW BLADE MAY ALSO BE USED. THE FOLLOWING TOOLS ARE RECOMMENDED:




HAND SAW - USE A FINE TOOTHED BLADE. HOLD THE BLADE AT A LOW ANGLE AND CUT SLOWLY WITH REGULAR STROKES.

TABLE SAW OR CIRCULAR SAW - USE A FINE TOOTHED BLADE WITH 80 TEETH OR MORE. CARBIDE TIPPED BLADES ARE RECOMMENDED FOR EXTENSIVE CUTTING OR LARGE QUANTITIES OF PANELS. ALLOW THE PANEL TO PASS THROUGH THE SAW WITH EVEN PRESSURE, AVOIDING UNNECESSARY FORCE. TAKE CAUTION TO AVOID OVERHEATING THE MATERIAL WITH THE BLADE.


JIG SAW - USE A FINE TOOTHED BLADE SUITED FOR FINISH WOODS AND PLASTICS. IF ADJUSTABLE, USE SLOWER SPEEDS AND STEADY MOVEMENT AND PRESSURE. CAREFULLY CLAMP ALL PANELS TO AVOID VIBRATION OR MOVEMENT WHEN CUTTING AND SUPPORT THE PANEL AT ALL TIMES.

CAREFULLY CONFIRM ALL CEILING CONDITIONS TO ENSURE PROPER DIMENSIONS BEFORE CUTTING. USE BLUE TAPE BEFORE MARKING THE FACE OF A TILE WITH PENCIL. MARKS WILL NOT ERASE FROM THE SURFACE.

UNSCREW FACTORY APPLIED GRIDCLIP HARDWARE AND RE-ATTACH AS NEEDED.

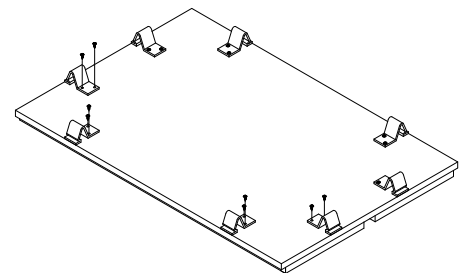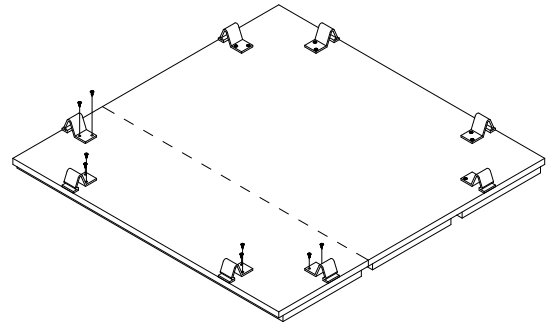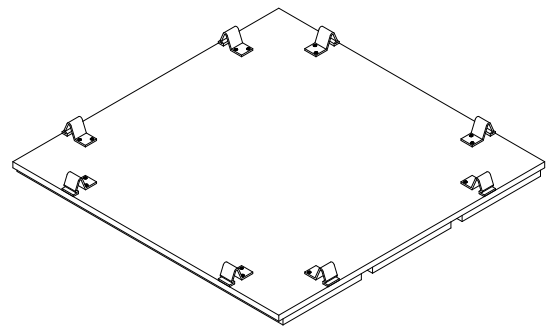

ALIGN THE EDGE OF THE HARDWARE
FLUSH WITH THE EDGE OF THE TILE




ACCOUNT FOR 1/4" REVEAL WHEN
MEASURING IRREGULAR T-GRID CELLS

CEILING PATTERN EXAMPLES


UNLIMITED PATTERN OPTIONS

SPECIFY A SINGLE TILE PROFILE OR COMBINE
MULTIPLE FOR ENDLESS CEILING PATTERNING.


ROTATE AND REPEAT.

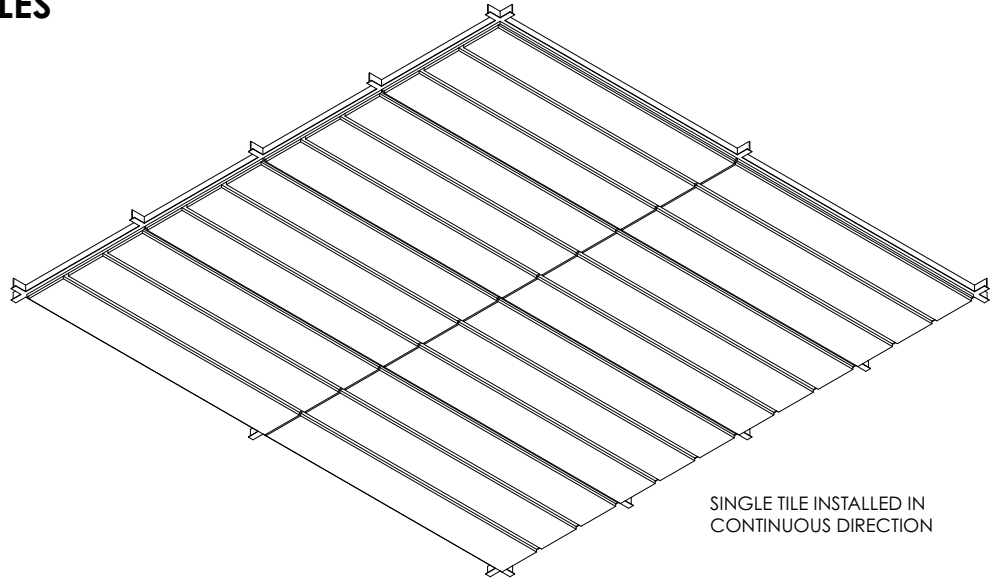

SINGLE TILE INSTALLED IN
CONTINUOUS DIRECTION

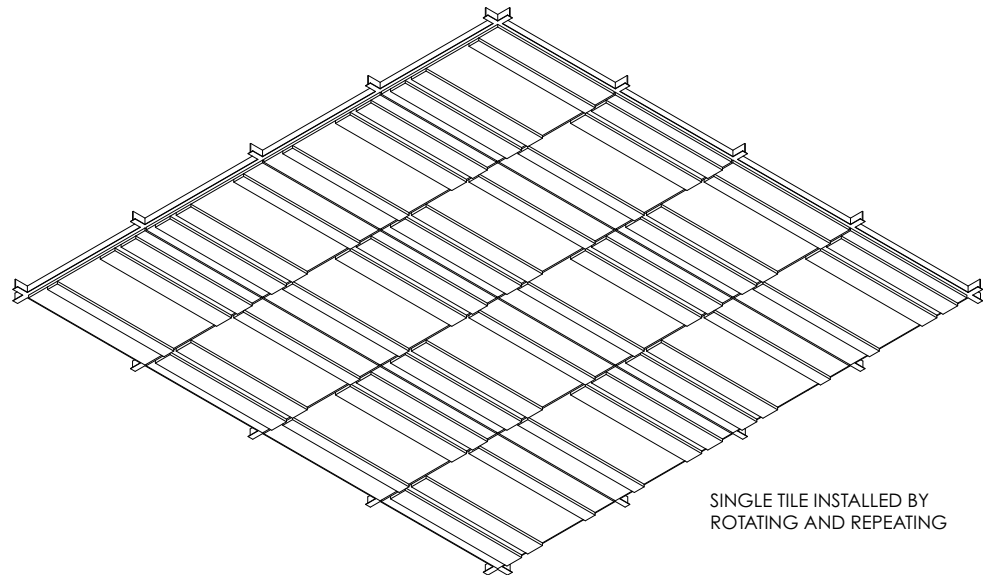

SINGLE TILE INSTALLED BY
ROTATING AND REPEATING

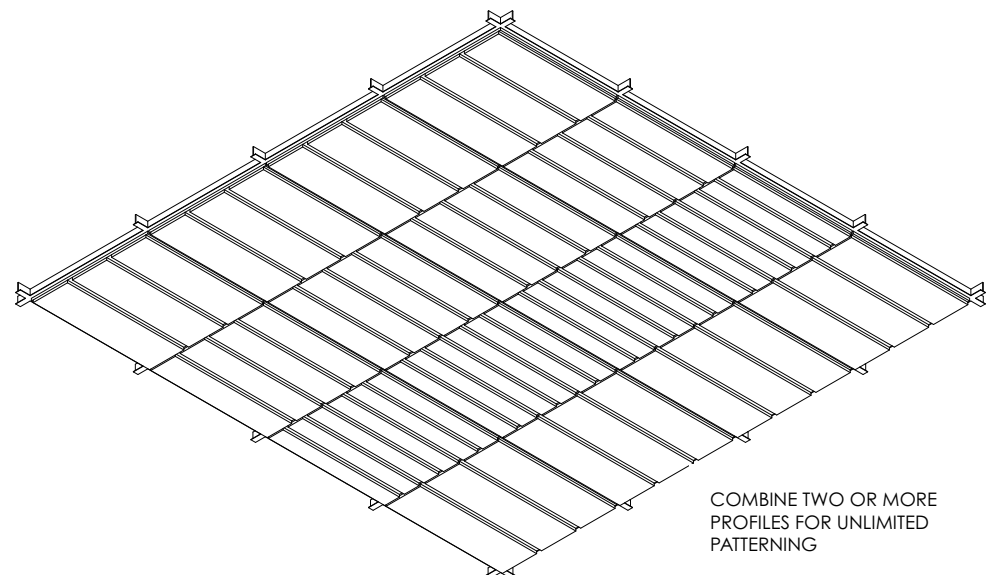

COMBINE TWO OR MORE
PROFILES FOR UNLIMITED
PATTERNING

ENVIRONMENTAL

DECLARE, MINDFUL MATERIALS & GREENGUARD GOLD CERTIFIED

We care about the environment and it matters that our materials support healthy and productive interior spaces. We use innovative materials while ensuring they meet the highest level of standards and expectations.

MUTO PET felt core material is 100% recyclable with no added urea-formaldehyde with a minimum of 60% pre-consumer recycled content. MUTO is Declare, Mindful Materials and GreenGuard Gold certified.

Declare.

